Miyu by Fibre Mood

Miyu by Fibre Mood

***☆☆

32 - 50

Miyu is inspired by the “hakama pants” in MOMU’s historical study collection. We made a wide asymmetrical divided skirt with elegant pleats, a broad, belted waistband and snap closure. Lengthen or take in these pants to turn them into maxi pants or culottes. Either way you go, both models guarantee a great result.

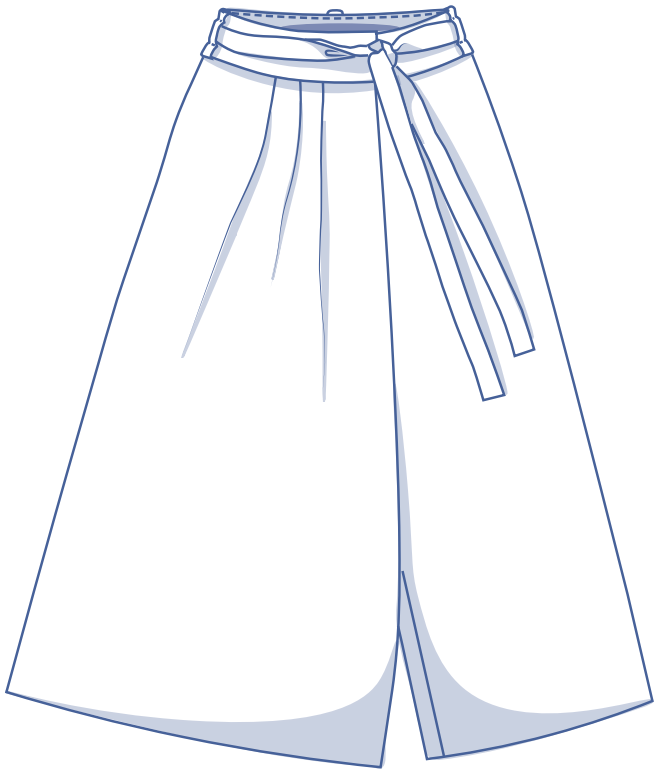

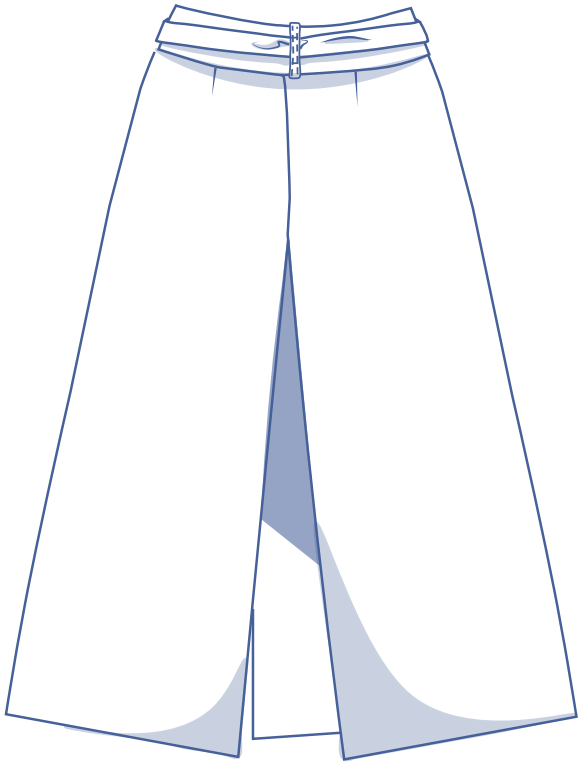

MODEMUSEUM ANTWERPEN

sizing chart

size (EU)	32	34	36	38	40	42	44	46	48	50
UK	4	6	8	10	12	14	16	18	20	22
WM (cm)	66	68	70	74	78	82	84	88	94.5	101
HM (cm)	86	90	94	97	100	103	106	109	115	120

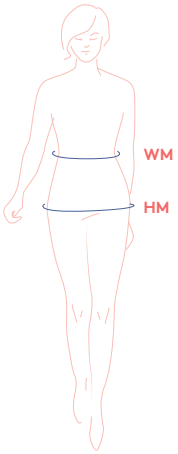

Waistline measurement (WL): Measure horizontally at the narrowest point of the body.
Hip measurement (HM): Measure horizontally at the widest point of the lower body.

measurements





size	32	34	36	38	40	42	44	46	48	50
side length* (cm)	92.5	93	93.5	94	94.5	95.5	96.5	97.5	98.5	99.5
inseam length (cm)	60.5	60.5	60.5	60.5	60.5	60	59.5	59	58.5	58
1/2 waistline measurement** (cm)	35	36	37	39	41	43	44	46	49	52.5
1/2 hip measurement** (cm)	46	48	50	51.5	53	54.5	56	57.5	60.5	63

** Including waistband.*
*** Measured across the back.*

Compare the stated lengths to the measured or desired lengths. Lengthen or shorten the pant legs by cutting the pattern pieces at the indicated double lines and then spreading the pattern pieces out X cm from each other or overlapping them, where necessary. Make sure that the CF and CB lines and the side seams are always straight.

IMPORTANT

Adapt the amount of fabric used to the alterations that you are making to the pattern!

supplies

size	32 - 40	42	44 - 50
fabric* (cm)	300	305	325

** 140 cm wide*

- Thread
- Iron-on interfacing: max. 50 cm
- 2 snaps (ø 2.1 cm):
- Fabric: see table

fabric advice

Use either a fabric with a fluid drape (such as crepe, fine-knits, viscose, etc.) for the Miyu Pants, or take the an alternative route and go for a stiffer fabric (such as jeans, cotton, etc.).

pattern pieces & seam allowances (in cm)

Draw 1 cm all the way around the paper pattern pieces unless stated otherwise in the illustrations.

The side of piece 5 lying on the fabric fold (⟶) does not have a seam allowance.

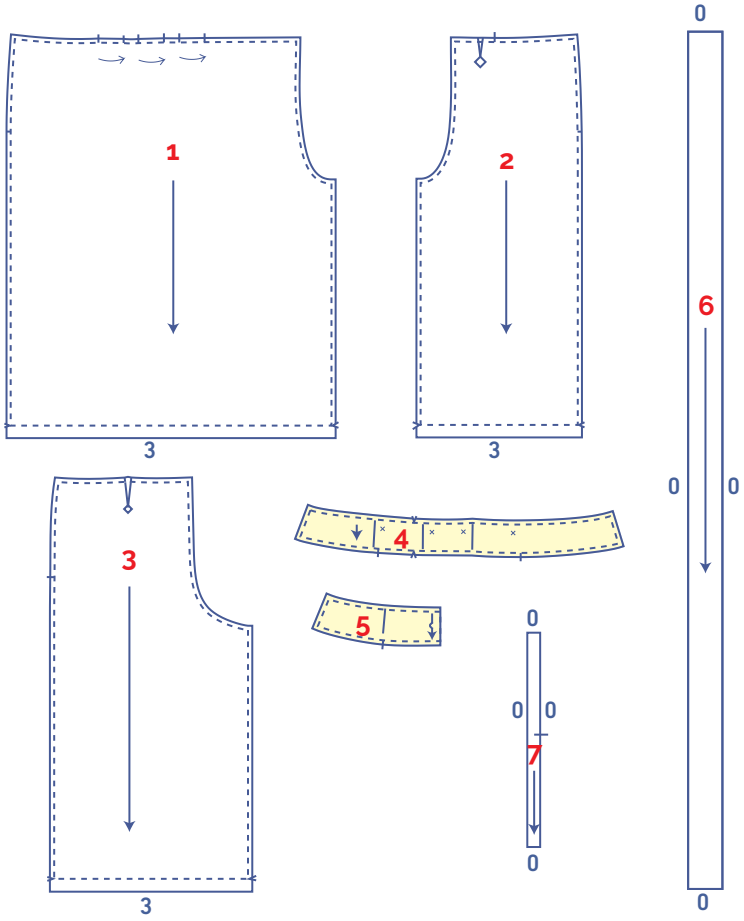

1 right front: 1x
2 left front: 1x
3 back: 2x
4 waistband facing front: 2x
5 waistband facing back: 2x on fabric fold
6 belt: draw a rectangle that is
8 x 180 cm (for sz. 30-42) or
8 x 200 cm (for sz. 44-50)
7 belt loops: draw a rectangle that is
3 x 30 cm

IMPORTANT

The pieces highlighted in light yellow have iron-on interfacing attached to the wrong side.

Indicate important points on the outline of the pattern:

• Nick the pattern paper and fabric at the places with a single vertical line (I).

• On pattern pieces 1, 2, 3 and 4, cut a small triangle out of the paper and fabric where a V notch is marked.

• To mark the middle of this piece, cut a small corner (V) out of piece 5 on the fabric fold.

Mark the centre of the places for the buttons (x) and other important points (◇) using needle and thread.

fabric plan

1. for fabrics 140 cm wide

First unfold the fabric all the way open to cut pieces 1 and 2 once and cut piece 4 twice. Make sure that you cut mirror images for piece 4 once.

Then fold the remaining fabric in half to cut the remaining pieces.

32-50

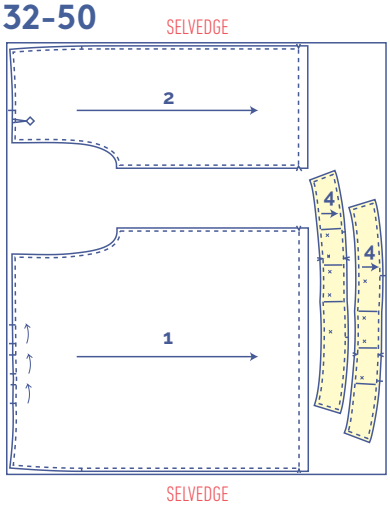

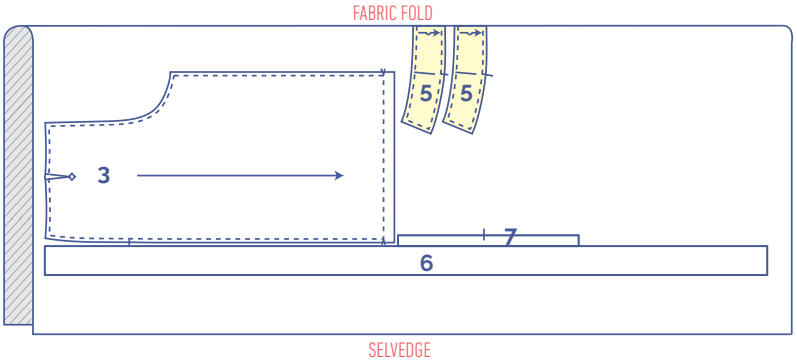

sewing instructions

The method used to finish sewing the garment depends on the fabric used. The pieces are always sewn together with the right sides of the fabric matching exactly, unless stated otherwise.

Key with symbols

- → right side
- → wrong side
- → iron-on interfacing
- **F** → front
- **B** → back
- **LF** → left front
- **RF** → right front
- **CF** → centre front
- **CB** → centre back

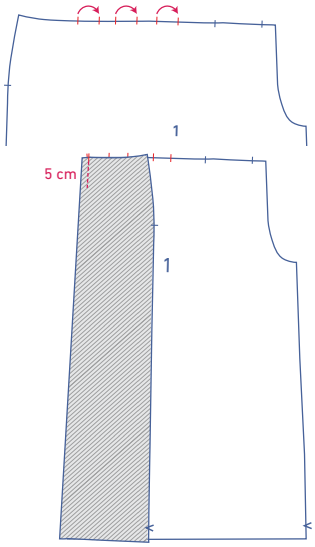

1

Shape the pleats by folding the nicks horizontally along the RF (1) together with the right side of the fabric facing inward. Sew the pleats in place using 5 cm of vertical stitches.

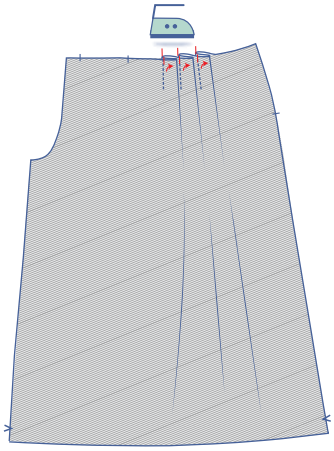

Press the fold allowance to the side seam.

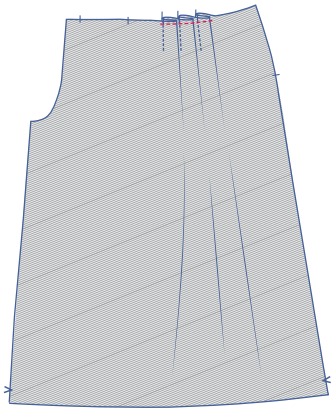

Sew the pleats together at 0.5 cm from the waist seam.



Match the nicks at the waist seam of the LF (2) and sew the dart/dart intake off toward the basting thread.

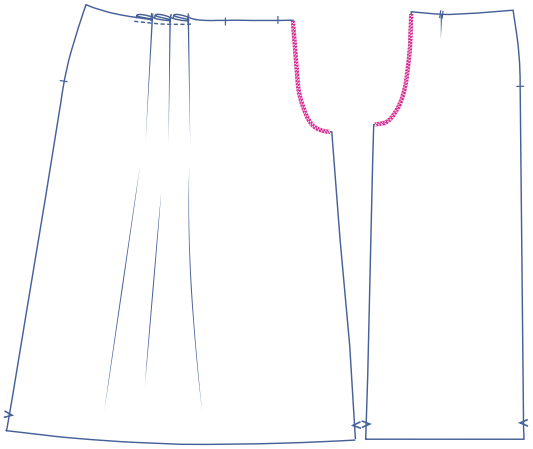

Overlock the CF-, inseam- and side seams of both front leg pieces.

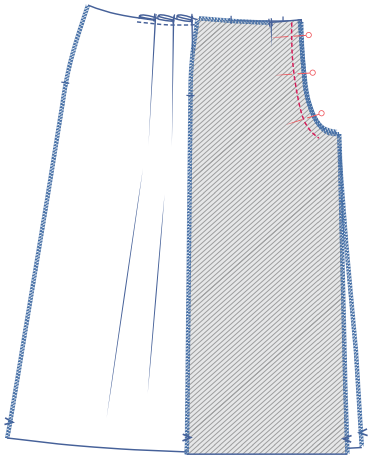

Pin and sew part of the CF seam. Start stitching approximately 2 cm from the inseam up to the top of the waist seam.



2

Match the nicks at the waist seam of the back (3) and sew the dart/dart intake off toward the basting thread.

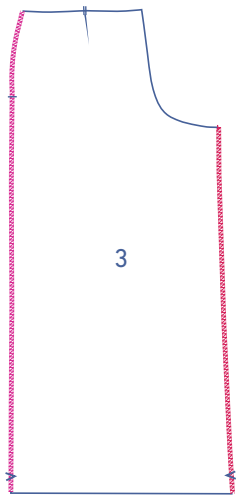

Overlock the inseam and side seams of both back leg pieces.

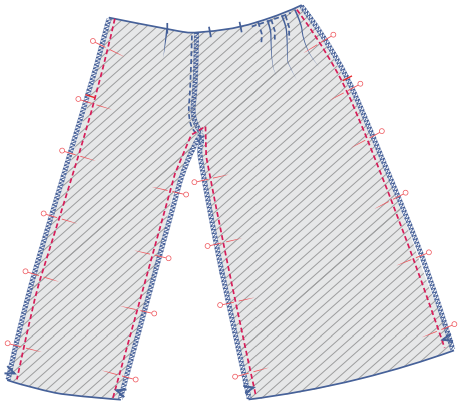

3

Pin the side and inseams of the front and back together and sew in place. Press the seams open.



Slide both pant legs into each other with the right sides of the fabric facing and stitch the crotch seam.



Finish the raw edges together using an overlock stitch.

4

Finish 1 long side of the fabric strip for the belt loops (7) using an overlock stitch.

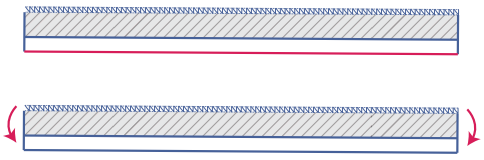

Press the side that has not been overlocked 1 cm over to the wrong side and press the overlocked side over this.

Sew in place at 2 mm along both sides of the edge.

Cut the strip into 3 equal parts.

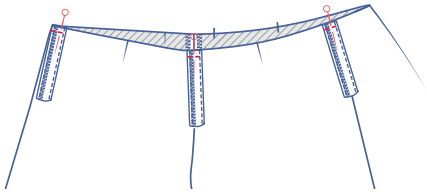

Pin the loops with the right sides face down on the top of the pants at the CB seam and the side seams. Sew into place at 0.5 cm.

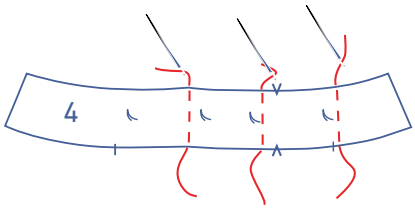

5

Mark the indicated fold lines on the waist band's front (4) using a basting stitch.

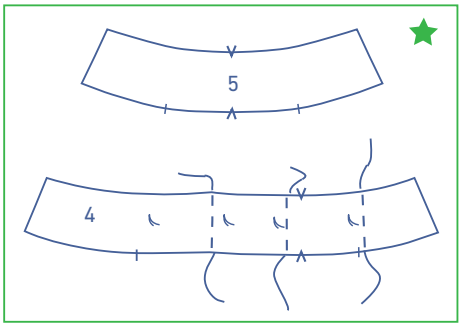

Place all waistband pieces facing you with the ride sides facing up. There should be two pairs, i.e. 1 pair consisting of 1 back waistband + 1 front waistband, with the markings on the right side (= indicated by a green star) and 1 pair that consists of 1 back waistband + 1 front waistband with the markings on the right side (= indicated by a red star).

The waistband with the green star will be placed on the right side of the pants, while the waistband with the red star will be on the inside.

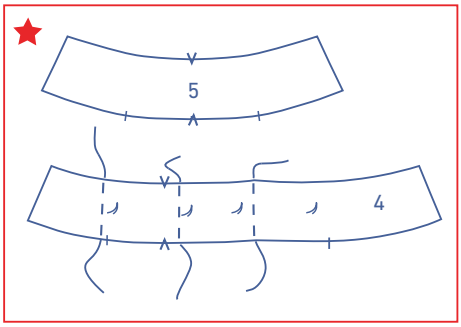

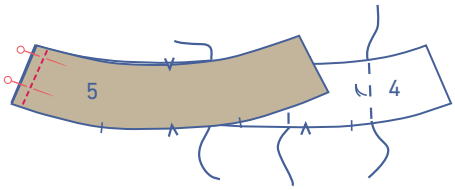

Pin and sew the seams of both pairs and press the seams open.

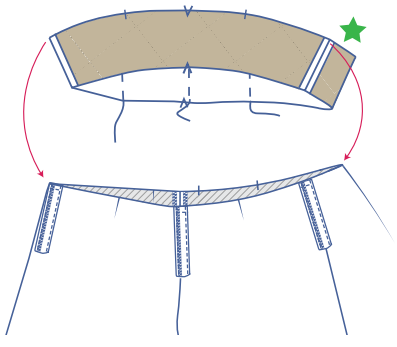

Slide the waistband marked with the green star over the pants with the right side facing down.

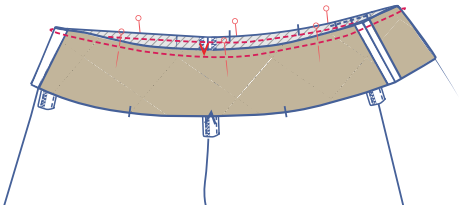

Pin and sew the bottom of the waistband to the pants with the side seams and the markings matched exactly.

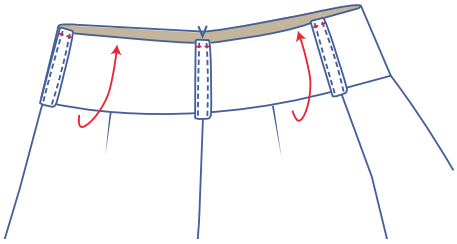

Fold the waistband with the belt loops up. Pin the top of the belt loops in place at 0.5 cm from the edge of the waistband.

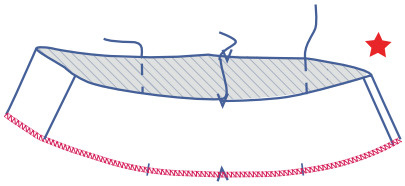

Finish the bottom of the waistband marked with the red star using an overlock stitch.

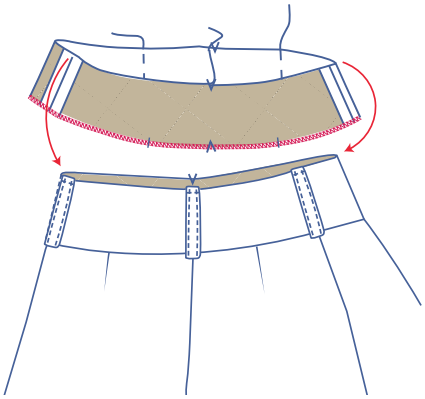

Slide the waistband over the pants with the right side facing down.

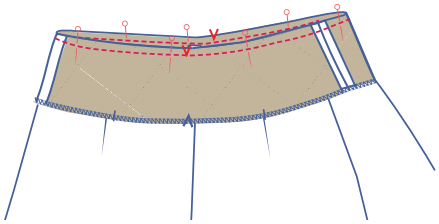

Pin and sew the top of both waist bands with the nicks and side seams matching exactly.



Fold the waistband with the overlocked bottom back up, so that both waistbands are lying with the right side facing up. Lay the seam allowance toward the waistband with the overlocked bottom. 2 mm from the seam, sew through all the layers of the waistband with the overlocked bottom (+ the underlying seam allowance). Next, fold the waistband back down toward the inside of the pants.

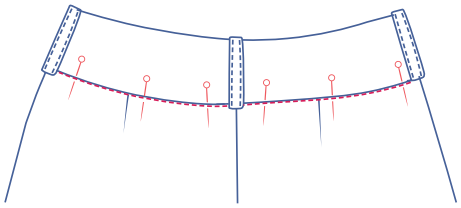

Pin the waistband in place along the right side of the pants and stitch in the ditch.

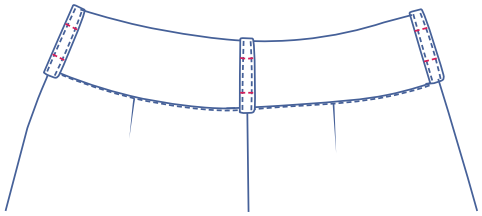

Pin the belt loops in place just a few centimetres from the top and bottom of the waistband so that the belt fits snugly between the two.

6

Finish the hem of the pants using an overlock stitch.



Press the seam allowance up to the V notches and sew in place.



7

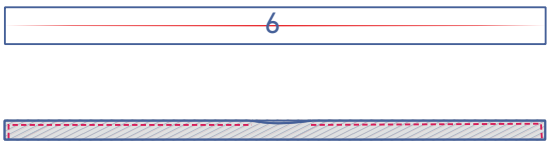

Press the belt (6) in half lengthwise and sew the 3 sides. However, be sure to leave an opening so that the belt can be turned inside out.

Turn inside out, press neatly and sew the opening closed.

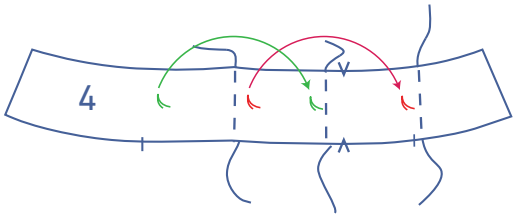

Sew the snaps on at the indicated places. Fold the waistband in half where the centremost marking is located.
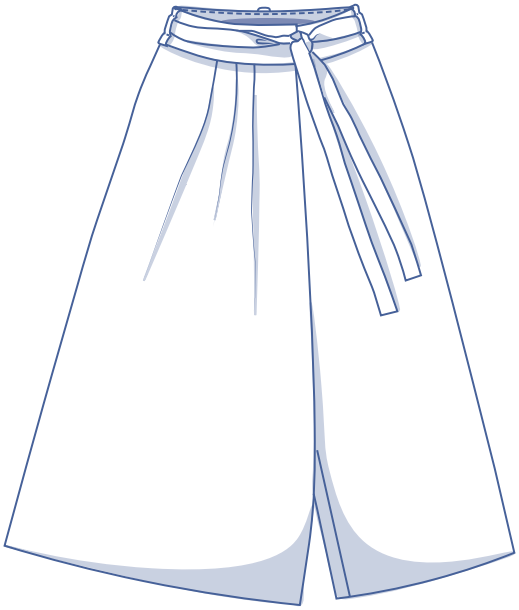
Thread the belt through the belt loops.