

Rufus by Fibre ⚡ood





Rufus by Fibre ⚡ood

***✂✂



2 - 14 years

It only took a flash for tracksuit bottoms to become a key item in the wardrobes of young and old alike. The Rufus trousers are super cool: they come with double welt pockets (just like the real thing) at the front and there are two unfinished patch pockets at the back. The trousers are made of a combination of sweatshirt fabric and cuff fabric. However, there is also a version in ribbed jersey that has been cut in different directions.

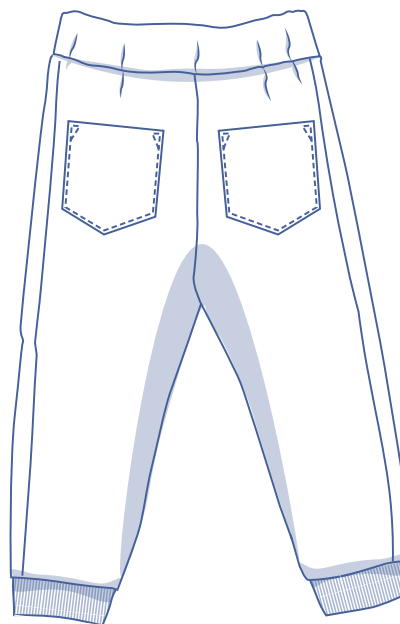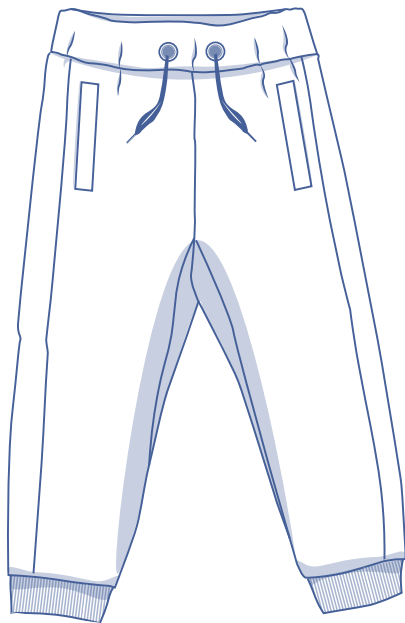


Size Chart


age (EU)	2	3	4	5	6	8	10	12	14
WM (cm)	50	52	53	54	55	57	60	62	66
HM (cm)	56	58	60	62	64	68	72	76	80

Waist (WM): measure horizontally at the narrowest point of the body.

Hip (HM): measure horizontally around the widest part of the lower body.

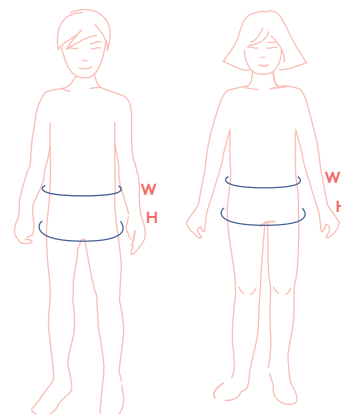

measurements (in cm)



age	2	3	4	5	6	8	10	12	14
side length*	48.25	52.25	56.25	60.25	64.25	72.25	82.25	90.25	98.25
inseam length	23.5	27	30.5	34.25	37.75	45	52	59.25	66.5
1/2 waistband circumference**	29.75	30.5	31.5	32.25	33	34.5	36	38	39.5
1/2 hip circumference	32.5	34	35.25	36.75	38	40.75	43.5	46.25	49

* Includes the waistband and cuff.

** Does not include an elastic band.

Compare the stated lengths to the measured or desired lengths. **Lengthen** or **shorten** the trouser legs by cutting the pattern pieces at the indicated double lines and then spreading the pattern pieces out X cm from each other or overlapping them, where necessary. Make sure that the CF and CB lines and the side seams are always straight.



IMPORTANT

Adapt the use of fabric based on these alterations.

supplies



- Thread
- Scrap of iron-on interfacing
- Metal grommet (Ø 1.1 cm): 2 (optional: you can also make a buttonhole)
- Cord (optional): see table
- Elastic band (4 cm wide): see table
- Cuff fabric: see table
- Fabric: see table

age	2	3	4	5	6	8	10	12	14
cord (in cm)	79	81	83	85	87	89	91	95	98

age	2	3	4	5	6	8	10	12	14
elastic band (in cm)	50	52	53	54	55	57	60	63	66

fabric used (in cm) F collection	2	3	4	5	6	8	10	12	14
ribbed jersey fabric width 170 cm	60	65	70	75	75	85	95	100	110

Comprehensive information about the fabrics in the Fibre Mood collection along with the accompanying fabric plans can be found [here](https://www.fibremood.com/en/fabrics) or on www.fibremood.com/en/fabrics.

fabric used (in cm)	2	3	4	5	6	8	10	12	14
cuff fabric fabric width 35 cm	12	12	12	12	12	12	16	16	16
standard fabric fabric width 140 cm	60	65	70	75	75	85	95	100	110

The corresponding fabric plan can be found on the last page.


fabric advice



Make the Rufus trousers in sweatshirt fabric, French Terry, Ponte Roma, ribbed jersey, etc. Cut the cuffs from rib-knit trim. Comprehensive information about the fabrics in the Fibre Mood collection can be found [here](https://www.fibre mood.com/en/fabrics) or on www.fibre mood.com/en/fabrics.

pattern pieces & seam allowances (in cm)

To sew the garment together as described in the instructions, you must draw the illustrated seam allowances around the paper pattern pieces before cutting them out.

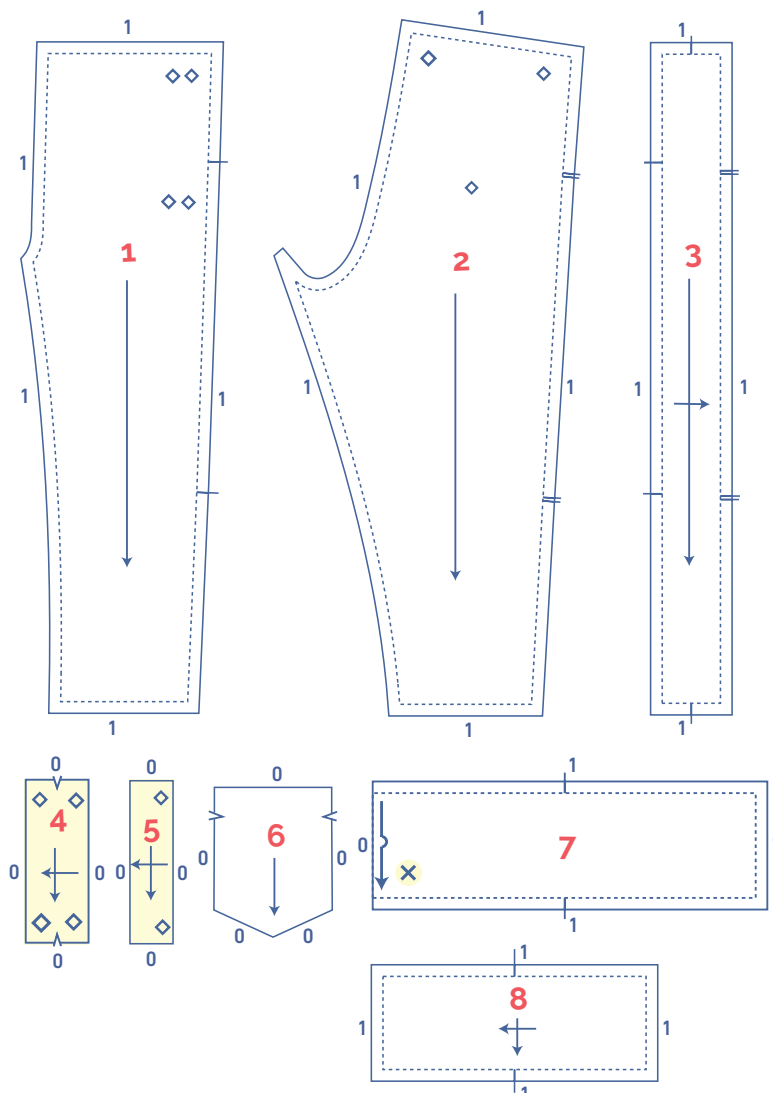

1. front: 2x
2. back: 2x
3. side strip: 2x
4. welts: 2x
5. pocket opening: 2x
6. back pocket: 2x
7. waistband: 1x on the fabric fold
8. hem: 2x (in cuff fabric)*

* For the trousers in ribbed jersey, cut the pattern piece in ribbed jersey as well and not in cuff fabric.

IMPORTANT

The pieces highlighted in light yellow have iron-on interfacing attached to the wrong side.

Mark the following points on a pattern piece using basting thread (↯).

Xxx: I
Xxx: ◇

Mark crucial points on a pattern outline by cutting neatly through the pattern paper and fabric at a I or II symbol and/or by cutting a small corner out of the fabric at a V symbol.

Cut a small corner (V notch) out of pieces that lie on the fabric fold (↯) to mark the middle of these pieces.

sewing instructions



The method used to finish sewing the garment depends on the fabric used.
The pieces are always sewn together with the right sides of the fabric matching exactly, unless stated otherwise.

F front

B back



right side



wrong side




cuff fabric




iron-on interfacing


1

Use tailor's chalk to draw the rectangle on the pattern on the wrong side of the front (1).

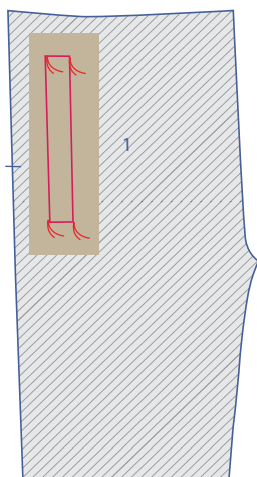


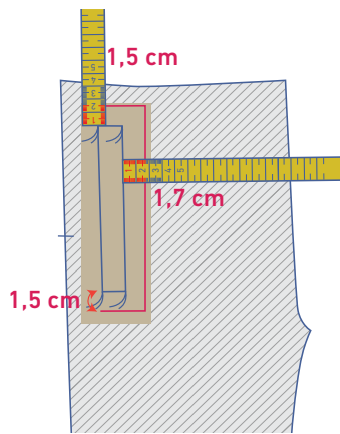


Use tailor's chalk to draw an extra guideline 1.5 cm next to both short sides and one at 1.7 cm on the CF side.

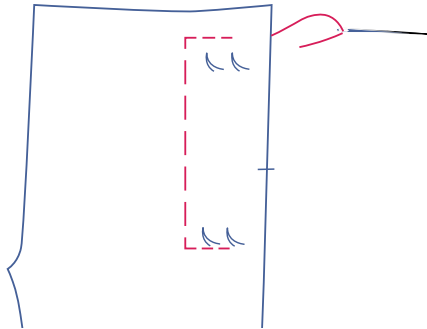


Use an eye-catching thread to tack along these chalk lines, that way the shape will be visible on the right side of the front.




Press the welt (4) in half with the right side facing outward.




Use a long stitch (tack) to sew the welt at 1 cm from both raw edges. This stitching acts as an aid later on for sewing the welt at the right interval on the front.

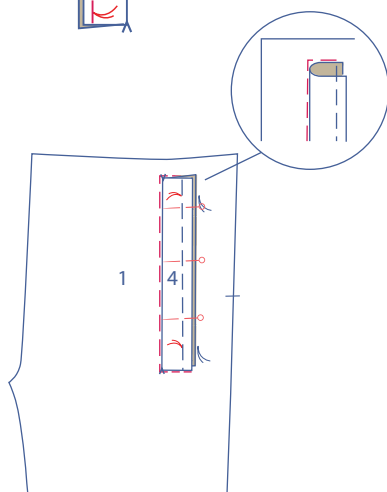


Pin the welt to the front with the fold line of the welt pressed in half against the vertical basting line, making sure that the basting threads match perfectly. The short sides of the welt are against the horizontal basting lines.

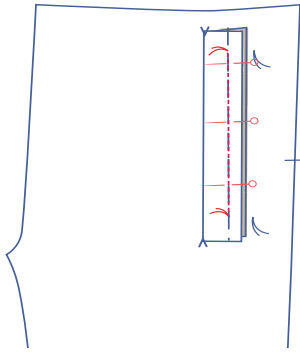


Sew the welt between the basting threads to the stitching you did earlier. 1.5 cm of seam allowance should remain along the top and bottom. Remove the tailor's tack.




Press the long side with the basting threads of the pocket opening (5) 1 cm over. Fold back open.

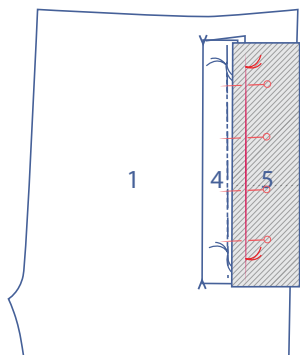


Pin the pocket opening to the front with the basting threads matching exactly. The pressed fold line must line up perfectly on the vertical side of the rectangle that is on the side of the side seam.

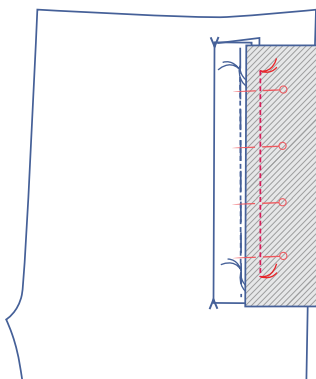


Sew in place in the pressed fold line between the basting threads. Here too there should be 1.5 cm of seam allowance left on both sides.

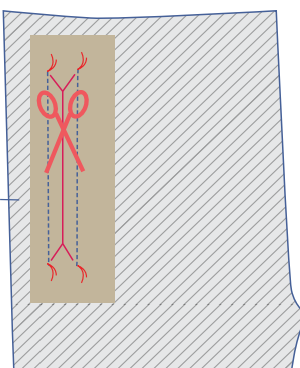



Turn the work piece over. Use appliqué scissors to snip between the two parallel stitches. Start and stop snipping at 1.5 cm away from each end. At the top and bottom of the cut, snip a diagonal line down to the last stitch of each set of parallel stitches. (4 diagonal lines) Important! Only snip through the front, not in the welt and pocketing opening.




Fold the pocket opening (5) to the side and through the opening towards the wrong side of the front.

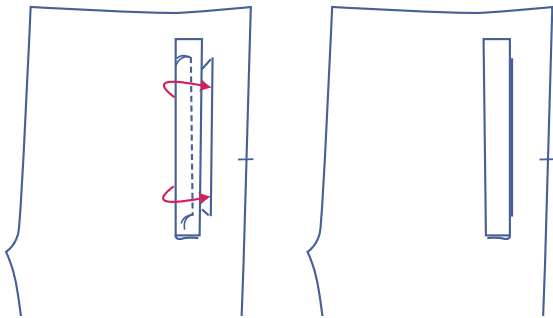


Also fold the welt to the side so that the fold line lies neatly on the vertical side of the rectangle, which is also where the seam of the pocket opening is. Push the seam allowance at the top and bottom through the opening to the wrong side of the front. Pull the front triangles (created when snipping) through to the wrong side.



Fold the front to the side at both the top and bottom of the pocket and place the welt and pocket opening's remaining 1.5 cm of seam allowance and the triangles together and sew together through all the layers.

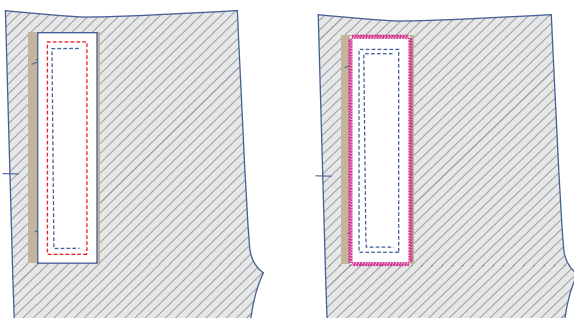


Continue to sew the edges together and finish the seam all the way around using an overlock stitch.




2

Press the top of the back pocket (6) over to the V notches.

Sew in place right next to the edge.

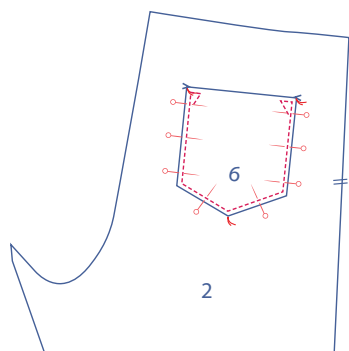


Pin the pocket at the place indicated on the back. Sew together at presser foot width from the edge. At the top, sew reinforcement triangles on both sides.

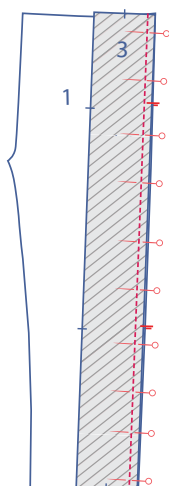


3


Pin and sew the side strip (3) to the front with the corresponding nicks matching exactly.

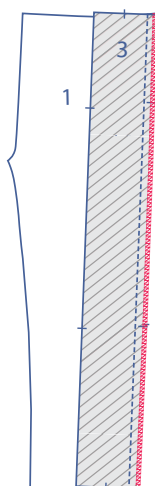


Finish the raw edges using an overlock stitch and press the seam allowance to the side strip.

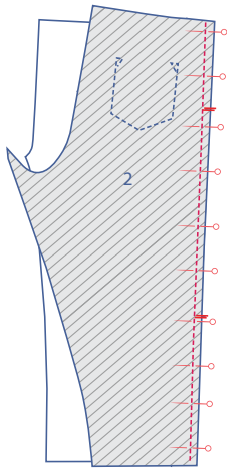


Pin and sew the other side of the side strip to the back with the corresponding markings matching exactly.

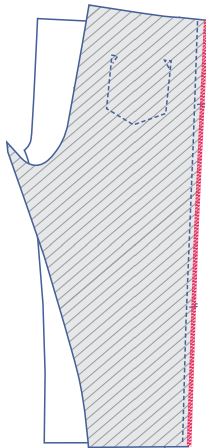


Finish the raw edges using an overlock stitch and press the seam allowance to the side strip.

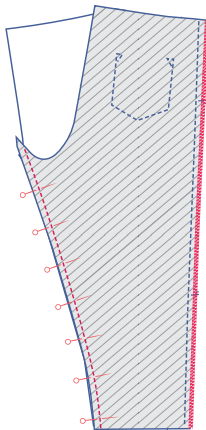


Pin and sew the inseams of the front and back together.

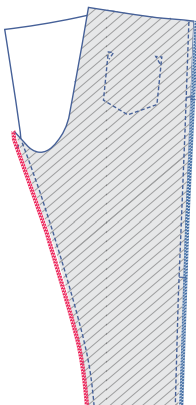


Finish the raw edges together using an overlock stitch and press the seam allowance to the front.



Slide both trouser legs into each other with the right sides facing together.




Pin and sew the crotch seam.




Finish the raw edges together using an overlock stitch.


4



Attach the grommets at the places indicated on the waistband (7).

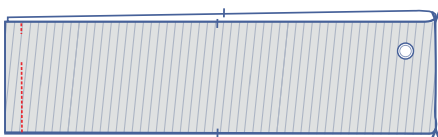


Fold the waistband in half with the right side facing inward. Pin the short side in place and sew. Leave an opening so that the elastic band can be threaded through later.

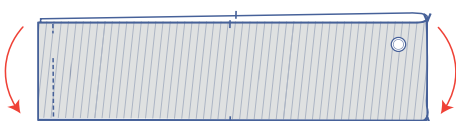


Fold the waistband in half in the other direction.








Pin and sew both of the raw edges of the waistband to the waistline of the trousers.




Finish the raw edges together using an overlock stitch.




Thread the elastic band through the opening in the waistband.



Allow 3 cm of the ends to overlap and sew together using a Box X stitch.




Pull the elastic through the casing completely. Sew the opening closed.

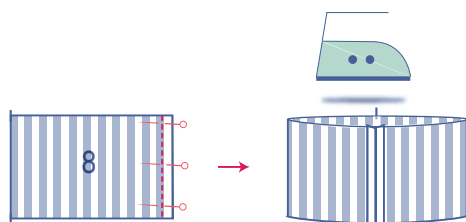


5


Fold the cuffs (8) in half lengthwise with the right side of the fabric facing inwards and sew the short side. Press the seam open.




Fold the cuff in half in the other direction.



Pin and sew both raw edges of the cuffs to the bottom of the trousers, making sure that the nicks and seams match: the cuff seam should line up with the inseam. The circumference of the cuffs is smaller than the circumference of the trouser legs, so stretch the cuffs to match the trouser legs.



Finish the raw edges together using an overlock stitch.

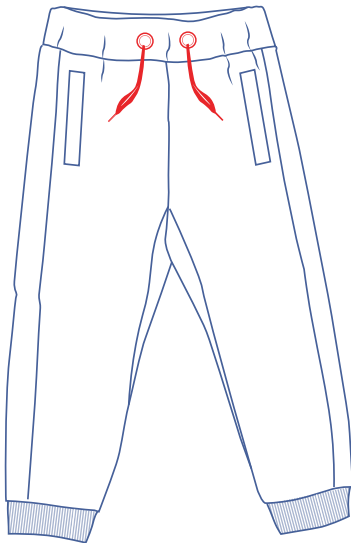


6

Thread the cord through the tunnel.

fabric plan for 2 - 14 years

for fabric 140 cm wide

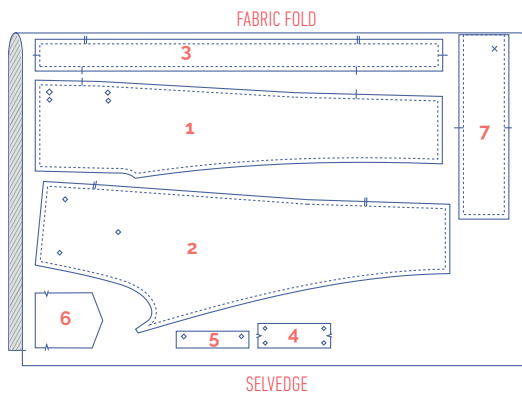

for knit 35 cm in the round for ribbing

