Benita by Fibre 400d




Benita by Fibre 400d



Simple and comfortable, the Benita trousers will be your go-to this winter! These easy wearing trousers feature an elasticated waistband and straight leg.

As far as length and style go, there are options galore: casual or chic, full length or cropped culottes...anything goes!

Add flair with a festive bow at the waistband.

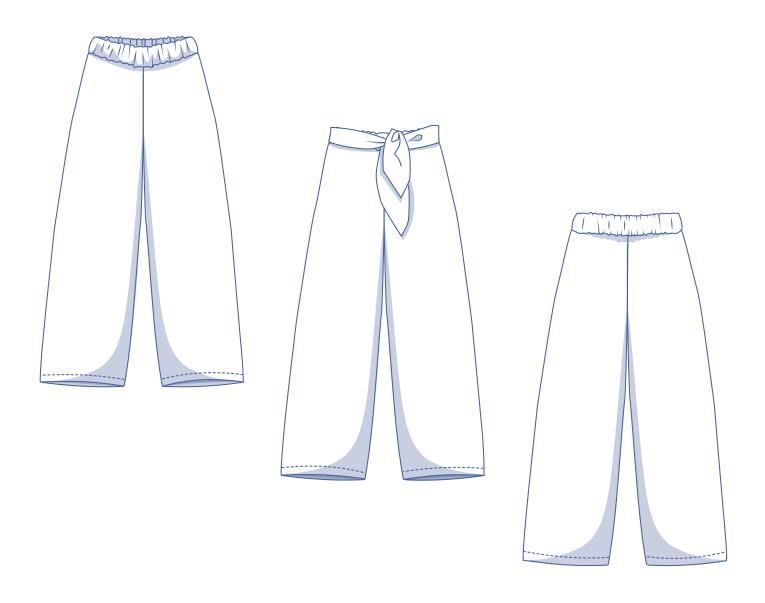

size chart

size (EU)	32	34	36	38	40	42	44	46	48	50	52	54	56	58
UK	4	6	8	10	12	14	16	18	20	22	24	26	28	30
US	0	2	4	6	8	10	12	14	16	18	20	22	24	26
W (cm)	66	68	70	74	78	82	84	88	94.5	101	107.5	114	120.5	127
W (inches)	26	26.8	27.6	29.1	30.7	32.3	33.1	34.6	37.2	39.8	42.3	44.9	47.4	50
H (cm)	86	90	94	97	100	103	106	109	115	120	125	130	135	140
H (inches)	33.9	35.4	37	38.2	39.4	40.6	41.7	42.9	45.3	47.2	49.2	51.2	53.1	55.1




Waist (W): measure horizontally around the widest part of the waist.

Hips (H): measure horizontally around the widest part of the lower body.

To select the right size for this pattern, the hip measurement should be your guideline. Pick the size that is the best match for your hips. Altering the waist is simple. When you are tracing the waist, simply merge between the two size lines of the waist and hip for a custom fit.

finished garment measurements (in cm)



This chart's measurements are the pattern measurements based on the fabric type and serve as a reference. Ease has been added to the width measurements (on top of the exact body measurements) for a more comfortable fit and to achieve a particular cut (fitted, loose or oversized). Depending on the preferred fit, you could choose to size up or down accordingly.

size	32	34	36	38	40	42	44	46	48	50	52	54	56	58
side length*	99.5	100	100.5	101	101.5	102	102.5	103	103.5	104	104.5	105	105.5	106
inseam length	71.25	71.25	71.25	71.5	71.5	71.5	71.5	71.5	71.5	71.75	71.75	71.75	71.75	72
waistline**	59	61	63	67	71	75	77	81	87.5	94	100.5	107	113.5	120
hips	90.5	94.75	99.25	102.5	105.75	109	112.25	115.5	122	127.5	133	138.25	143.75	149.25
hem circumference	54	57.25	60.5	62	63.25	64.75	67	68.25	71.75	74	76.5	79	81.25	83.75

^{*} Including the waistband.

Compare the stated lengths to the measured or desired lengths. Lengthen or shorten the trouser legs and/or the rise by cutting the pattern pieces at the place(s) indicated by a double line on the drawing above and then spreading the pattern pieces out X cm from each other or overlapping them, where necessary. Make sure that the CF and CB lines and the side seams are always straight.



IMPORTANT

Adjust the fabric to be used based on these alterations.

^{**} Waistline with elastic.

supplies



Thread

• Elastic (width 5 cm): see table

• Fabric: see table

elastic (in cm)	32	34	36	38	40	42	44	46	48	50	52	54	56	58
length	62	64	69	70	74	78	80	84	91	97	104	110	117	123

fabric used (in cm) F4 collection	32	34	36	38	40	42	44	46	48	50	52	54	56	58
velour jersey fabric width 145 cm	175	185	205	205	205	205	210	210	215	215	240	240	240	245
checked fabric fabric width 150 cm	175	175	185	205	205	210	210	210	210	210	215	240	240	245
camel ribbed jersey fabric width 150 cm	175	175	185	205	205	210	210	210	210	210	215	240	240	245

Discover the Fibre Mood fabric collection and the accompanying fabric layouts here or on www.fibremood.com/en/fabric.

	oric used (in cm) andard	32	34	36	38	40	42	44	46	48	50	52	54	56	58
fab	oric width 140 cm	185	205	205	205	205	210	210	210	215	235	240	240	240	245

The corresponding fabric plan can be found on the last page of these sewing instructions.

fabric advice



Depending on the look you want, there are a variety of fabric options to choose from. For an athleisure look, use stable interlock, French terry or sweatshirt knit. Elevate Benita to evening wear with a velour jersey, ribbed jersey or even a woven crepe with a print. Choose a fabric that moves with the body.

			1			1	_	
H 1	h	r 👝	~_	-0	$\sim c$	1 #	:Ra	nita
			_	_	\mathbf{c}	A TT	שכ	mu


sewing instructions




The method used to finish the garment will depend on your chosen fabric. The pieces are always sewn together with right sides facing, unless stated otherwise.




F	front
В	back
CF	centre front
СВ	centre back
	right side
	wrong side
	cuff fabric
	elastic band



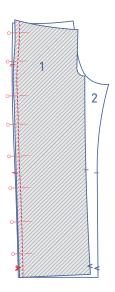


1

Pin and of the front (1) and back (2) together.

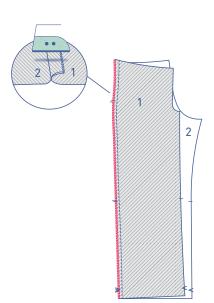


Finish the raw edges together with overlock stitching. Press the seam allowance toward the front.




2

Pin and sew the inside leg seams (inseams) of both trouser legs.




Finish the raw edges together with overlock stitching.




3

Slide both trouser legs into each other with the right sides faced together. Pin and sew the crotch seam.




Finish the raw edges together with overlock stitching.

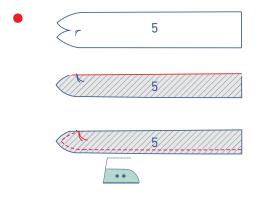




This step is optional.


Fold the ties (5) in half lengthwise with the right side of the fabric facing inwards and stitch the indicated sides starting from the basting thread. Next, turn the ribbons out the right way and handstitch the opening closed.

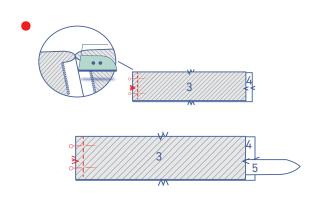


Pin the side seams of the waistband front (3) and waistband back (4) together. Press open the seam allowances. (Optional) If you're adding ties, slide the finished ties between both waistband pieces so that the raw edges are neatly aligned. The top of the ties should sit slightly below the V notch that indicates the midpoint of the waistband.




Fold the waistband in half widthways with the right side facing outwards until the V notches meet.

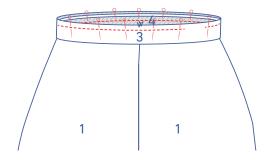


Pin and sew both of the raw edges of the waistband to the waistline of the trousers with the side seams and the corresponding nicks matching. Leave an opening in the waist seam so that you can thread the elastic through.

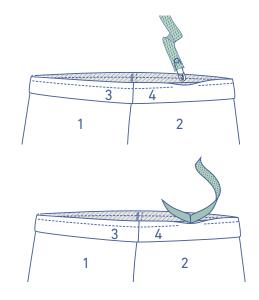


Thread the elastic through the waistband via the opening in the waistband.

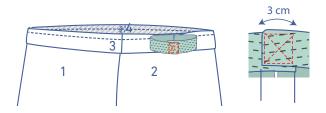

Allow 3 cm of the ends to overlap and sew together using a box X stitch. Pull the elastic all the way through the casing.




Sew the opening in the waist seam closed and finish the raw edges together with overlock stitching.




1



Finish the hem with overlock stitching.




Press the hem 3 cm over to the wrong side. Sew in place right next to the edge.




pattern pieces & seam allowances (in cm)

To sew the garment together as described in the instructions, you must draw the illustrated seam allowances around the paper pattern pieces before cutting them out.

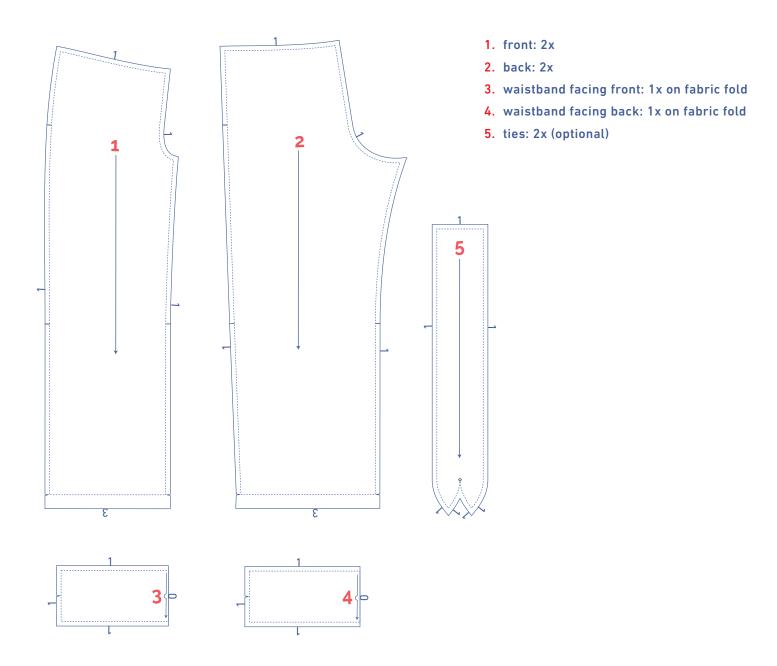

fabric plan for fabrics 140 cm wide

32-58

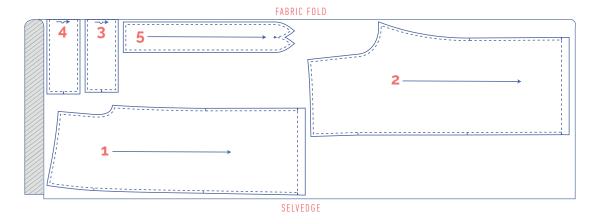

marking pattern pieces after cutting

• Mark the following points using basting thread.



- Nick the pattern paper and fabric at the places with a single vertical (I) line.
- Cut a small corner out of the fabric at a V notch symbol or on the finished hemline.
- Cut a small corner (V notch) out of the pieces that lie on the fabric fold (____) to mark the middle of these pieces.