

Dale by Fibre ⚡ood




Dale by Fibre ⚡ood



2 - 14 years


Here's a jumper with personality, for brothers and sisters. The Dale's raglan sleeves provides enough wiggle room for the little ones. The hem and neckline are finished in soft rib fabric, so this jumper looks sporty but feels great on. We know this staple piece will become one of their favourites!

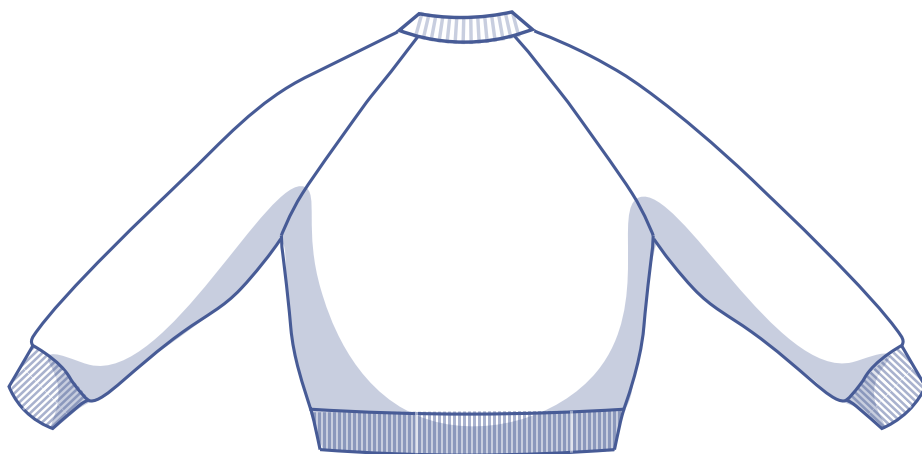


size chart (in cm)

size (age)	2	3	4	5	6	8	10	12	14
C	52	54	56	58	60	64	68	72	76


Chest (C): measure horizontally around the widest part of the chest.

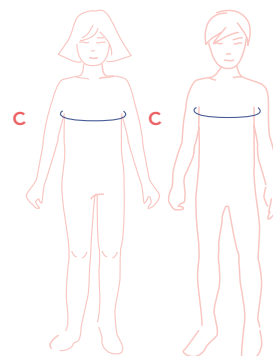

finished garment measurements (in cm)

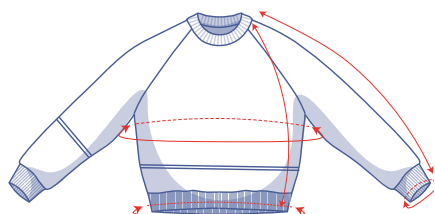

This chart's measurements are the pattern measurements based on the fabric type and serve as a reference. For a more comfortable fit and to achieve a particular cut (fitted, loose or oversized), ease has been added to the width measurements (in addition to the exact body measurements). Depending on the preferred cut, you could possibly go a size smaller or larger than the size chosen.

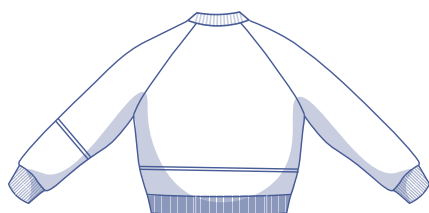

size	2	3	4	5	6	8	10	12	14
length*	38,75	40,75	43,25	46	48,5	53,5	58,5	63,5	68,5
sleeve length**	38,25	40	43,75	46,75	49,5	55,5	61,25	67	73
chest	75,5	77,5	79,5	81,5	83,5	87,5	91,5	95,5	99,5
hem band circumference	64,75	66,25	68	69,5	71,25	74,75	78	81,5	85
wrist trim circumference	14,25	14,75	15	15,25	15,5	16	16,75	17,25	17,75

* Including the neck and hem band.

** Including the shoulder length and wrist trim.

— you can lengthen
or shorten the pattern here

Compare the stated lengths to the measured or desired lengths. **Lengthen** or **shorten** the jumper and/or sleeves by cutting the pattern pieces at the indicated double lines and then spreading the pattern pieces out X cm from each other or overlapping them where needed. Make sure that the CF and CB lines and the side seams are always straight.



IMPORTANT

Adjust the amount of fabric to be used based on the alterations.

supplies



- Thread
- Cuff fabric (35 cm wide): see table
- Fabric: see table

cuff fabric (in cm)	2	3	4	5	6	8	10	12	14
fabric width 35 cm	40	40	50	50	50	50	50	50	50

fabric used (in cm) standard	2	3	4	5	6	8	10	12	14
fabric width 110 cm	80	85	90	95	100	110	120	135	145
fabric width 140 cm	70	75	80	85	90	100	110	120	130


The corresponding fabric layout can be found as of page 6 of these sewing instructions.

fabric advice




A good jumper has to be made up in the right sweatshirt material for feel and ease of wear. Think French terry or neoprene, fabrics with stretch and not too much drape work the best here.

Proud to be #Sewista







pattern pieces & seam allowances (in cm)

To sew the garment together as described in the instructions, you must draw the illustrated seam allowances around the paper pattern pieces before cutting them out.

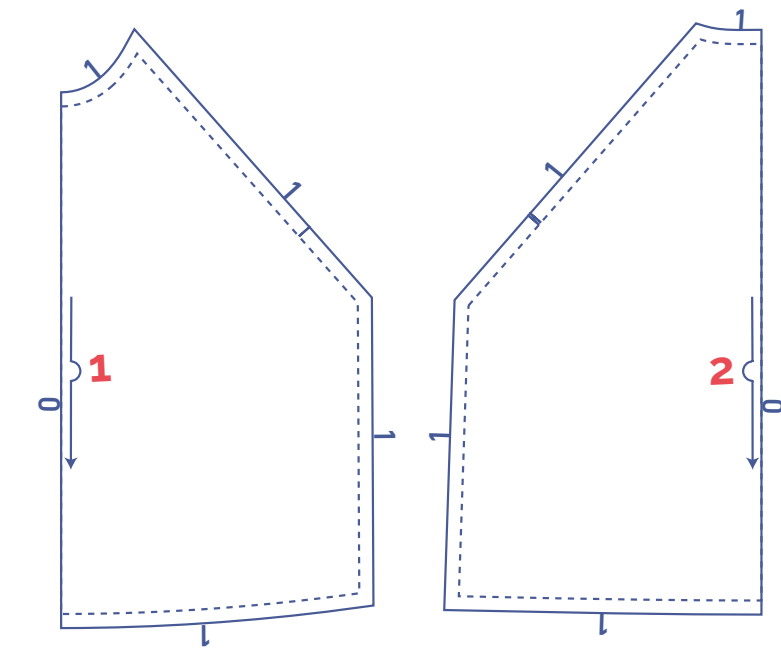


1. front: 1x on fabric fold
2. back: 1x on fabric fold
3. sleeve: 2x
4. wrist trim: 2x (in cuff fabric)
5. collar: 1x on fabric fold (in cuff fabric)
6. hem band: 2x on fabric fold (in cuff fabric)

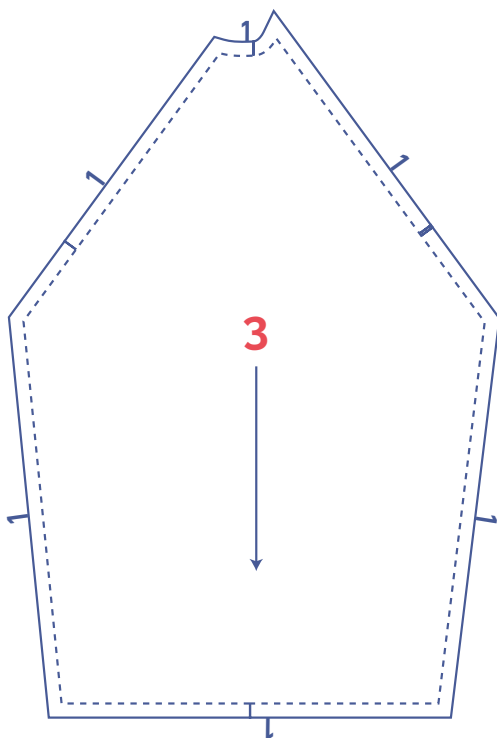


fabric layout for fabrics 110 cm wide

2 - 14 years

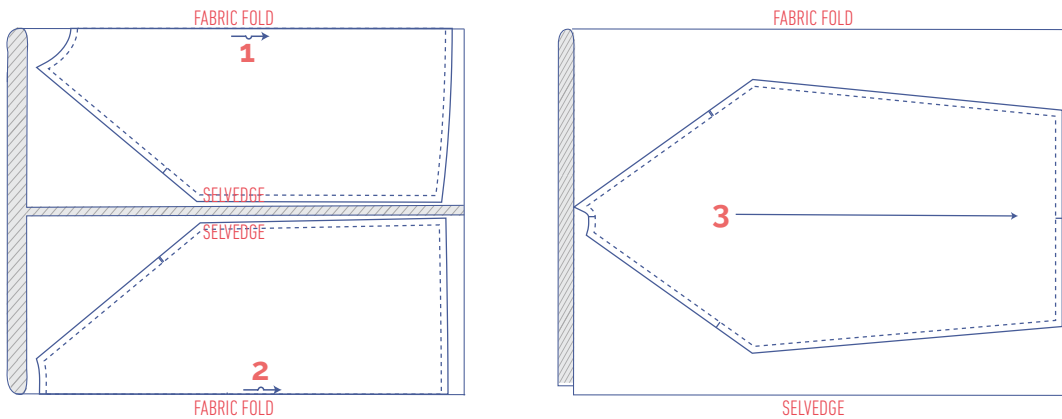

fabric layout for fabrics 140 cm wide

2 - 14 years

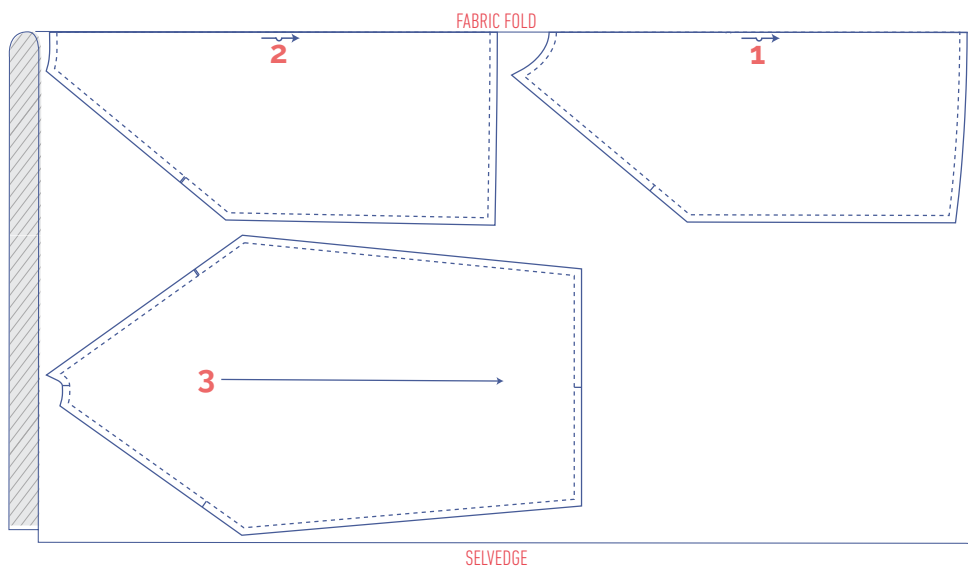

- Nick the pattern paper and fabric at the places where a single vertical line (I) and double vertical lines (II) are indicated.
- Cut a small notch out of the fabric at a V notch symbol or on the finished hemline.
- Cut a small notch (V notch) out of the pieces that lie on the fabric fold (—) to mark the middle of these pieces.

sewing instructions



The method used to finish the garment will depend on your chosen fabric.

The pieces are always sewn together with right sides facing, unless stated otherwise.

The sewing instructions explain how to make the jumper if you don't have an overlock machine.

Use a ballpoint needle on your sewing machine to stitch the seams and an overlock stitch to finish the raw edges. The jumper can also be sewn with a 4 thread overlock machine, i.e. 2 upper looper threads and 2 needle threads. The seams will remain stretchy.

F front

B back


CF centre front

CB centre back

 right side


 wrong side

 cuff fabric

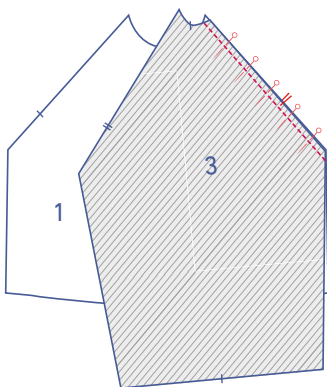


1


Pin and sew the sleeve side with a single notch (3) to the front with the corresponding notches matching.

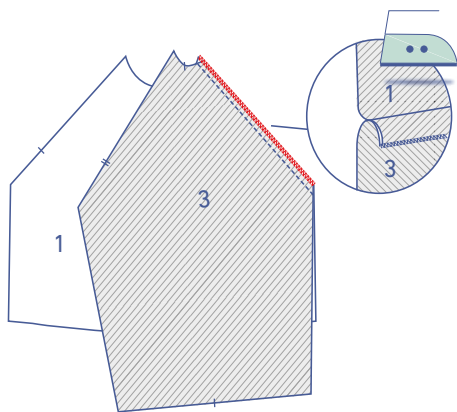


Finish the raw edges with overlock stitching and press the seam allowance towards the sleeve.

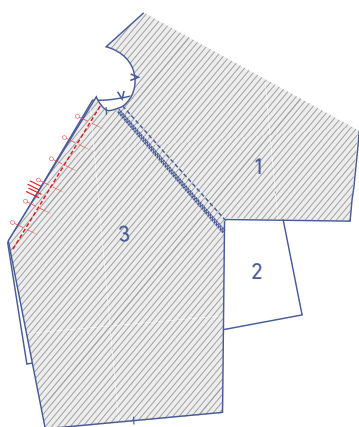

Pin and sew the sleeve side with the double notches (3) to the back (2) with the corresponding notches matching.

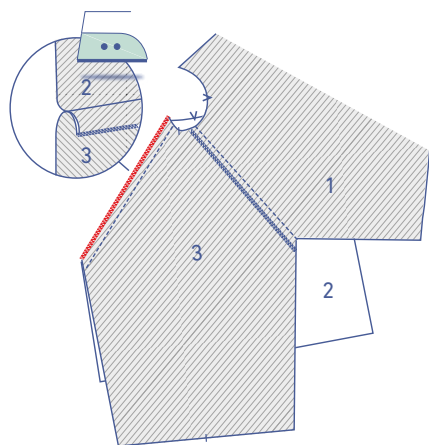


Finish the raw edges with overlock stitching and press the seam allowance towards the sleeve.

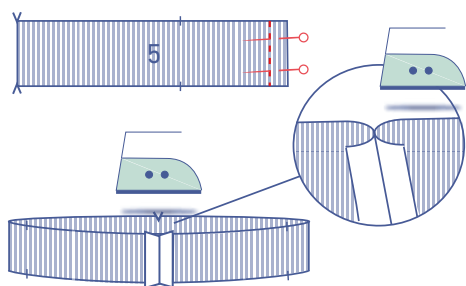


2

Fold the neck ribbing (5) in half widthways with right sides facing inwards. Pin and sew the CB seam. Press the seam allowances open.

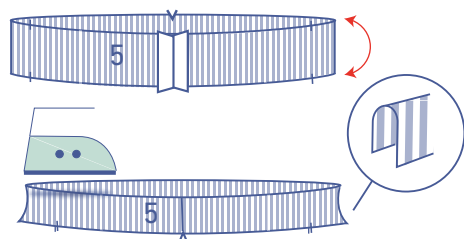


Fold the neck band in half lengthwise and press with the right sides facing outwards.

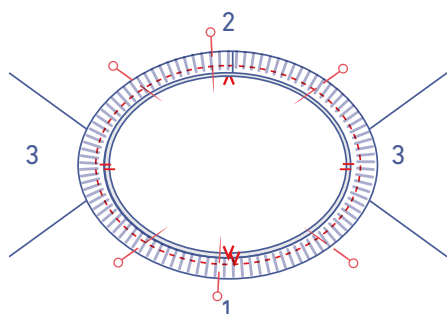


Pin and sew the raw edge of the neck ribbing to the neckline. The CB seam of the collar should line up with the V notch on the back, the notches on the neck band should match those on the sleeve indicating the shoulder and the V notches on the CF of the neck band and jumper should match.

Note: the circumference of the neck band is smaller than the neckline; stretch the fabric gently as your sew.

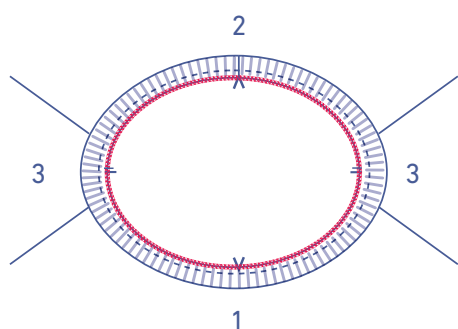


Finish the raw edges together with overlock stitching.

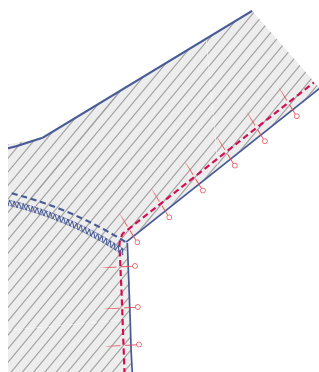


3

Pin and sew the side and underarm seams.




Finish the raw edges together.

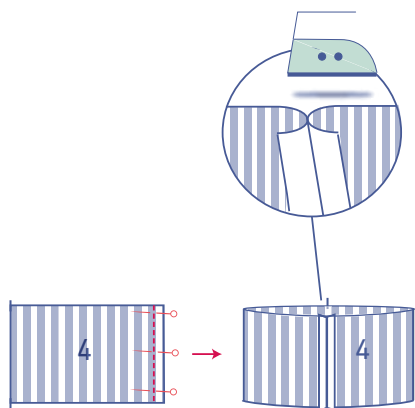


4


Sew the short ends of the wrist trims (4) and press the seam allowance open.

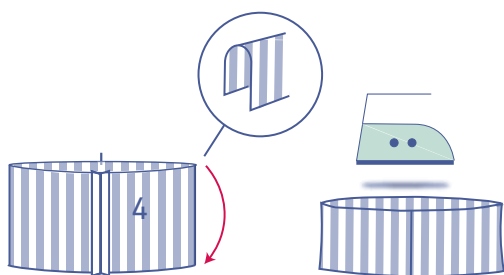

Press the wrist trim in half lengthwise with the right side of the fabric facing outwards.



Pin and sew the raw edges of the wrist trim to the bottom of the sleeve. Make sure that the seams and notches continue to match. The circumference of the wrist trim is smaller than the sleeve hem, so stretch the wrist trim gently as you sew.





Finish the raw edges together with overlock stitching.




5

Pin and sew the side seams of the hem band (6) and press the seam allowance open.

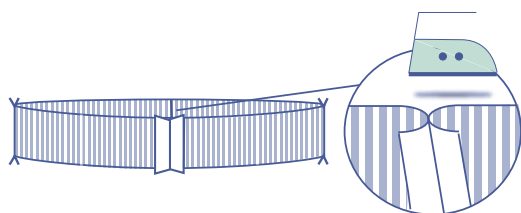


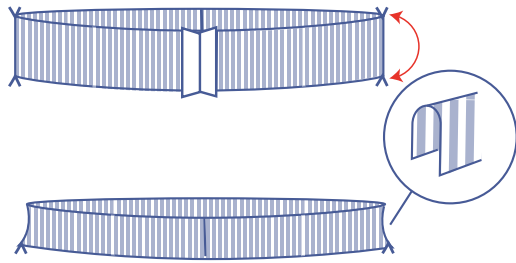

Press the hem band in half lengthwise with the right side of the fabric facing outwards.

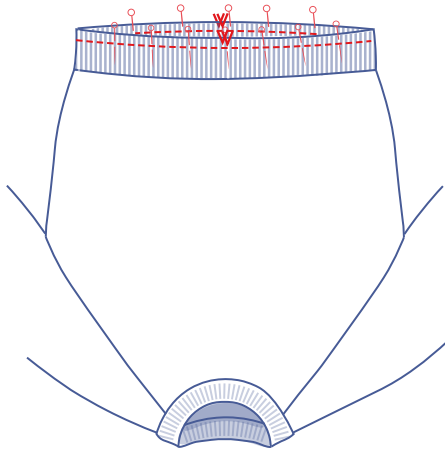

Pin and sew the raw edges of the hem band to the bottom of the jumper. Make sure that the seams and markings match up. The circumference of the hem band is smaller than the circumference of the garment, so stretch the hem band gently as you sew.

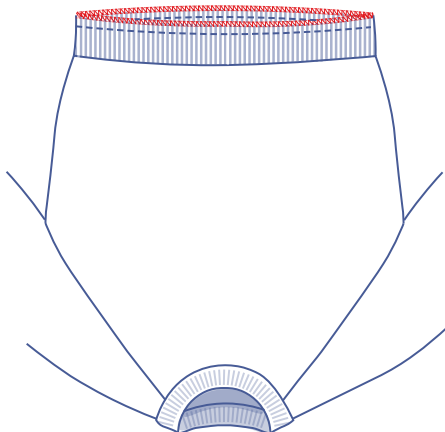

Finish the raw edges together with overlock stitching.