

Jasmin by Fibre ⚡ood




Jasmin by Fibre ood

***✂✂



4 - 30


What would the street scene be these days without high waisted trousers? The Jasmin paperbag trousers are super flattering and easy to wear. Featuring a relaxed fit without being baggy, you can roll them up at the ankles for even more trend appeal. And it goes without saying that they have pockets! Still not really sure if this pattern is for you? Check out the [style advice](#) first.

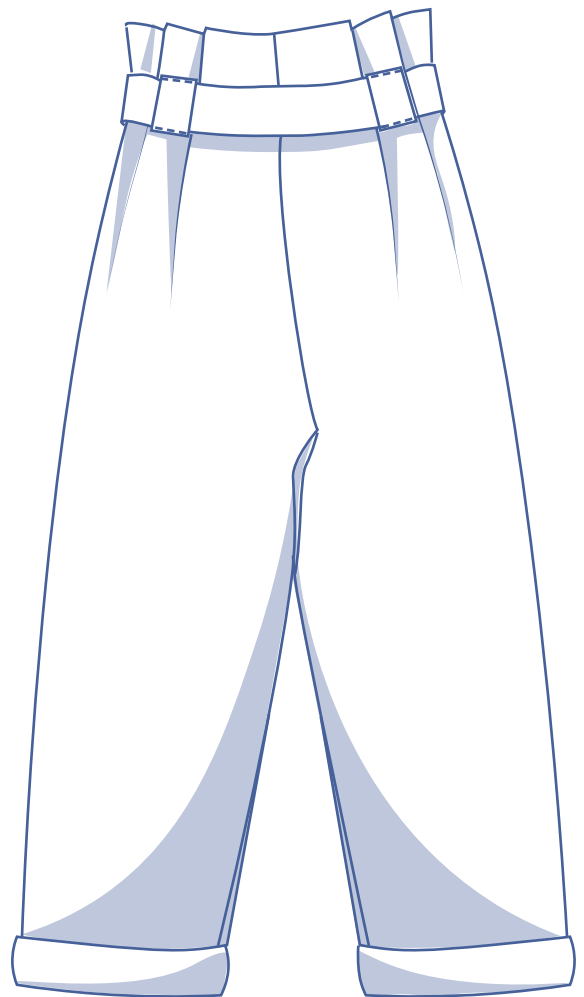


size chart (in cm)

size	4	6	8	10	12	14	16	18	20	22	24	26	28	30
body height	160	164	166	167	168	169	170	171	172	172	172	172	172	172
W (waist)	66	68	70	74	78	82	84	88	94.5	101	107.5	114	120.5	127
H (hip)	86	90	94	97	100	103	106	109	115	120	125	130	135	140

For this pattern, you should choose the size based on your hip measurement. Pick the size that is the best match for your hips. Altering the waist is simple. Just trace the lines for the one size instead of the other.

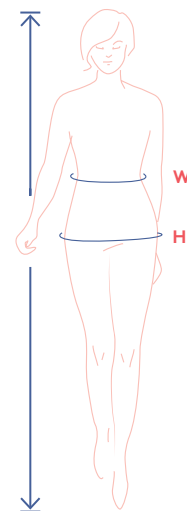

finished garment measurements (in cm)

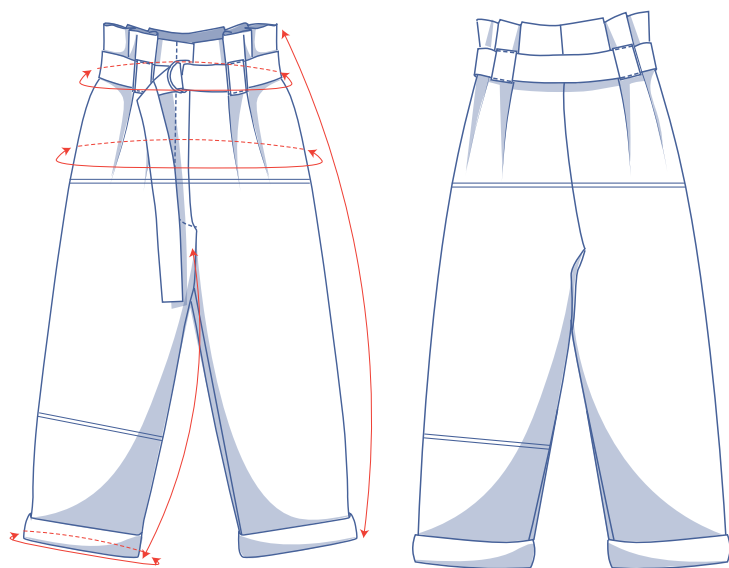

This chart's measurements are the pattern measurements based on the fabric type and serve as a reference. Ease has been added to the width measurements (in addition to the exact body measurements) for a more comfortable fit. The Jasmin trousers are designed to have a loose cut, but depending on the desired cut, you may decide on a smaller or larger size than the one normally recommended for your measurements.

Compare the stated lengths to the measured or desired lengths. **Shorten** or **lengthen** the trouser legs and/or rise by cutting the pattern pieces at the indicated double lines. Then either increase the distance between the cut pieces by the desired amount (to lengthen), or overlap the pieces (to shorten). Make sure that the CF and CB lines and the side seams are always straight.

— shorten or lengthen the pattern here

size	4	6	8	10	12	14	16	18	20	22	24	26	28	30
side length*	95.5	96	96.5	97	97.5	98	98.5	99	99.5	100	100.5	101	101.5	102
inseam length	61.75	62	62	62	62	62.25	62.25	62.25	62.25	62.25	62.5	62.5	62.5	62.75
waistline**	67.25	69.25	71	75	79	83.25	85	89.25	95.75	102.25	109	115.5	122	128.75
hips	94.25	98.25	102.25	105.5	108.5	111.5	114.5	117.75	123.5	128.75	133.75	138.75	144	149
hem circumference	41	42.75	44.25	45.25	46.5	47.5	48.75	50	52.25	54.25	56.5	58.5	60.75	62.75

* Keep in mind that this length extends 4.5 cm above the natural waist.

** With the pleats folded closed.

IMPORTANT

Adjust the amount of fabric to be used based on the alterations.



supplies



- Thread
- Snap (Ø 2 cm): 1
- D-rings (4 cm): 2
- Closed-end zip: see table
- Fabric: see table

zip		4	6	8	10	12	14	16	18	20	22	24	26	28	30
length	cm	12	12	12	12	12	12	12	12	14	14	14	14	14	14

fabric		4	6	8	10	12	14	16	18	20	22	24	26	28	30
fabric width 110 cm	cm	235	235	240	240	240	260	270	275	275	275	355	360	365	375
fabric width 140 cm	cm	220	225	230	240	240	240	240	245	245	245	245	245	255	275


The corresponding fabric layout can be found on page 6 of these sewing instructions.

fabric advice

(Stretch) cotton, stretch denim, linen, soft leather or gabardine are all winners.




Proud to be #Sewista



pattern pieces & seam allowances (in cm)

To sew the garment as described in the instructions, you must draw the illustrated seam allowances around the paper pattern pieces before cutting them out.

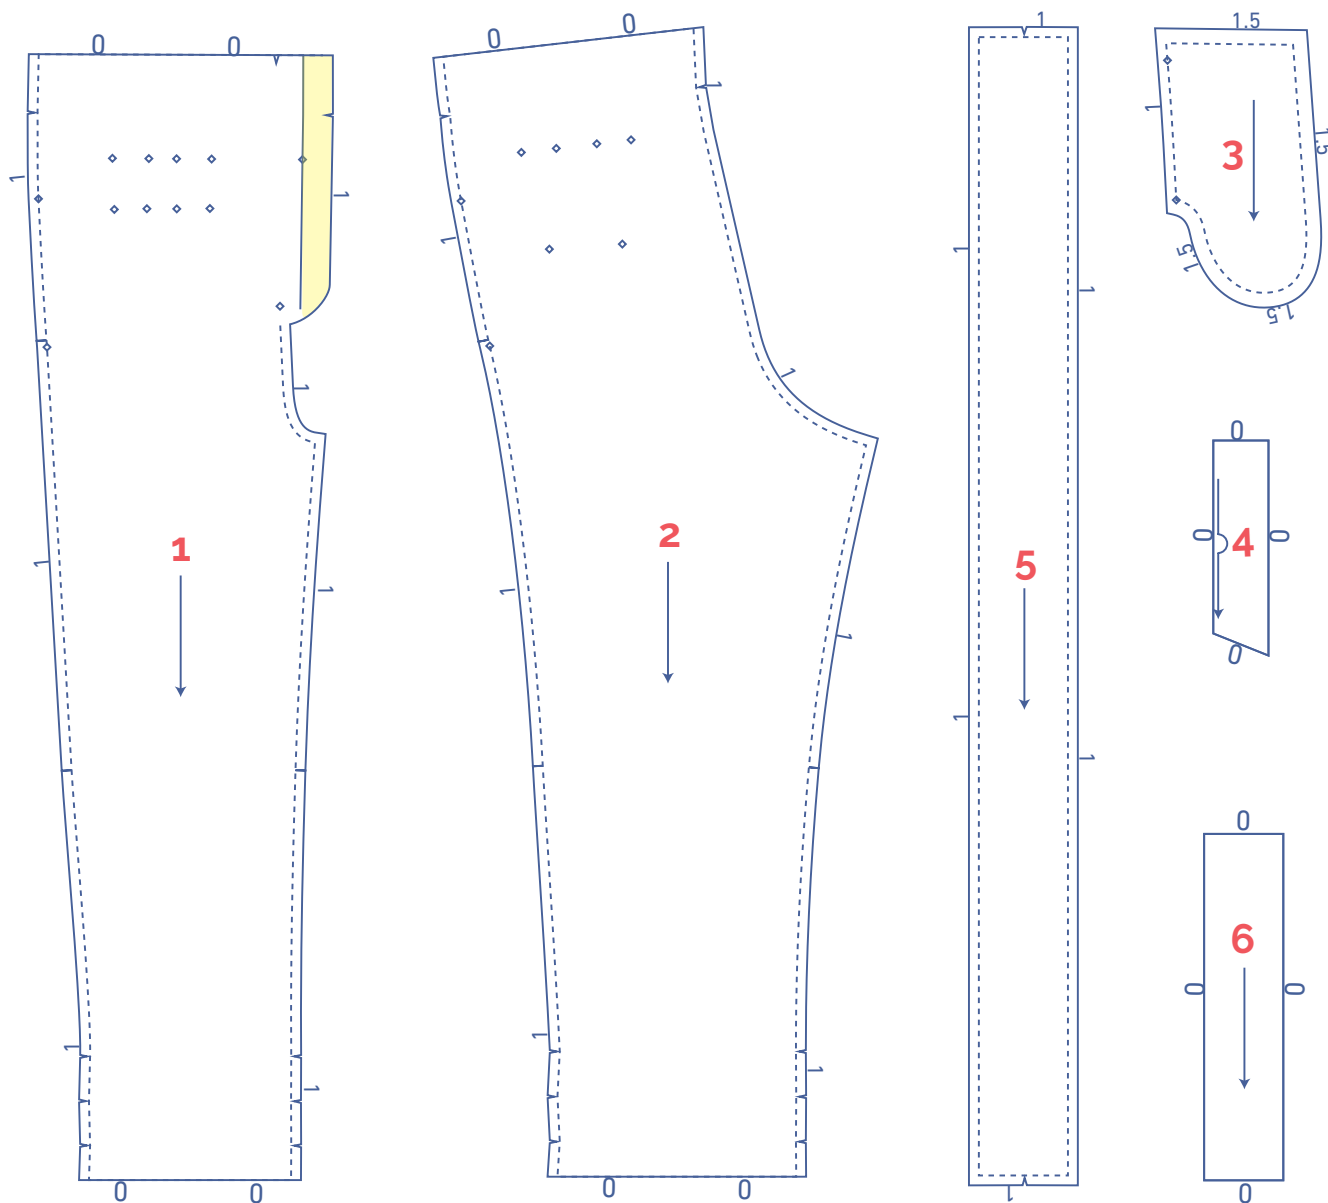

IMPORTANT


The pieces highlighted in light yellow have iron-on interfacing attached to the wrong side.

- 1. front: 2x
- 2. back: 2x
- 3. pocket: 4x
- 4. fly LF: 1x on fabric fold
- 5. belt: 1x
- 6. belt loops: 1x


?	material type
	fabric
	iron-on interfacing

fabric layout – solid fabrics fabric width 110 cm


4 - 14

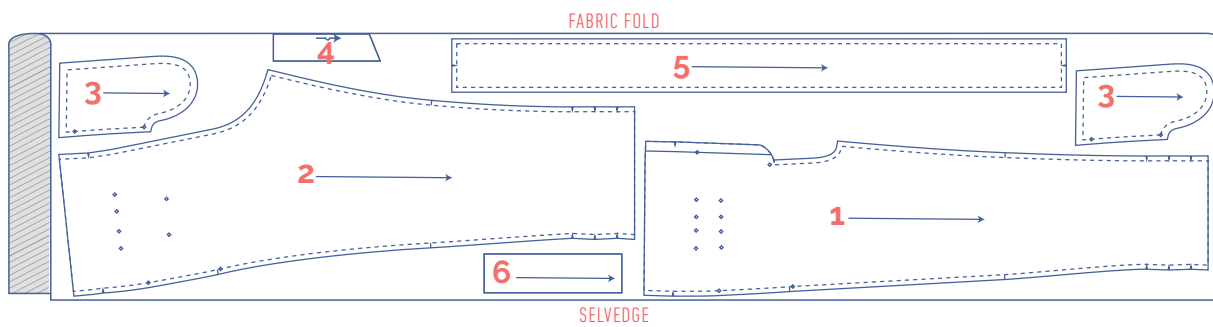

16 - 22

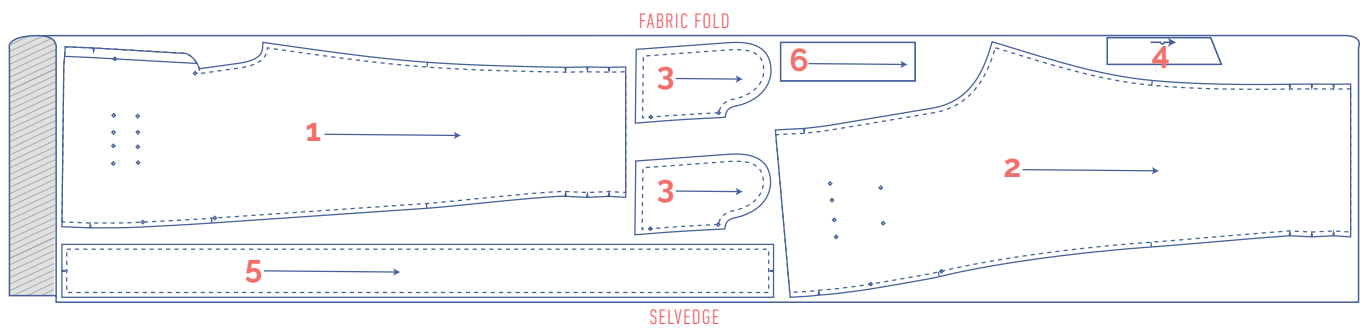


24 - 30

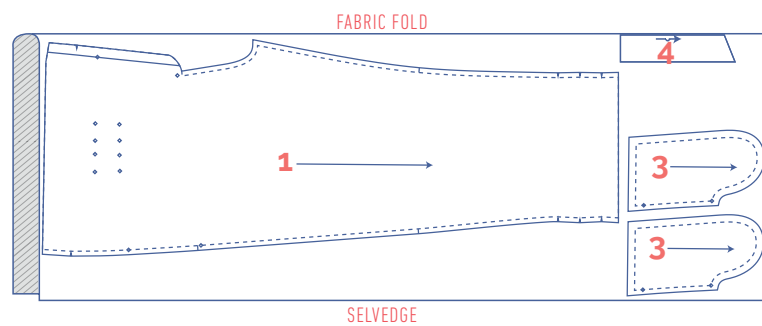


IMPORTANT

You only need pattern pieces 5 and 6 once.

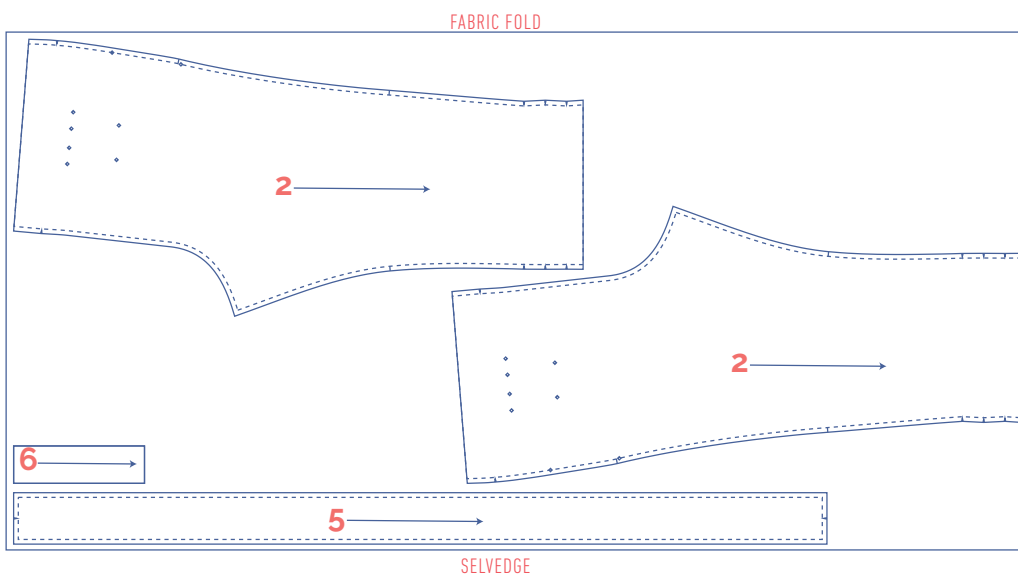


fabric layout – solid fabrics fabric width 140 cm

4 - 10

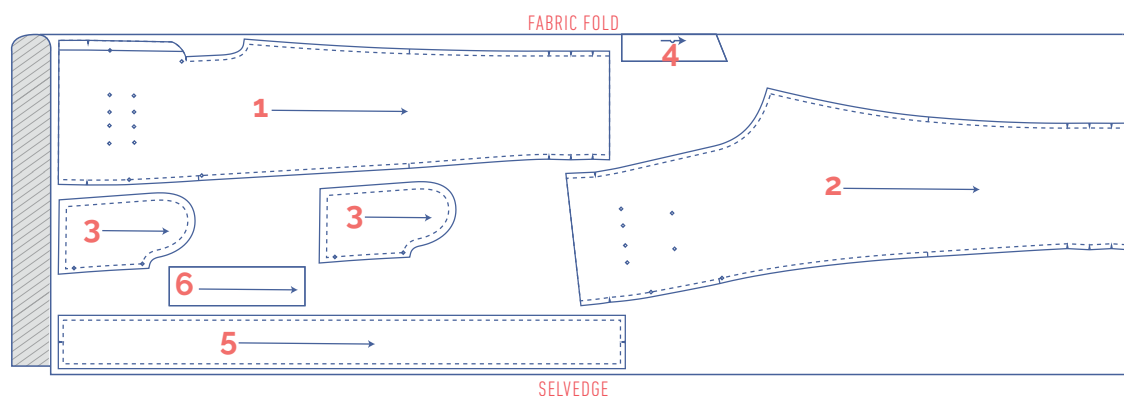


12 - 30

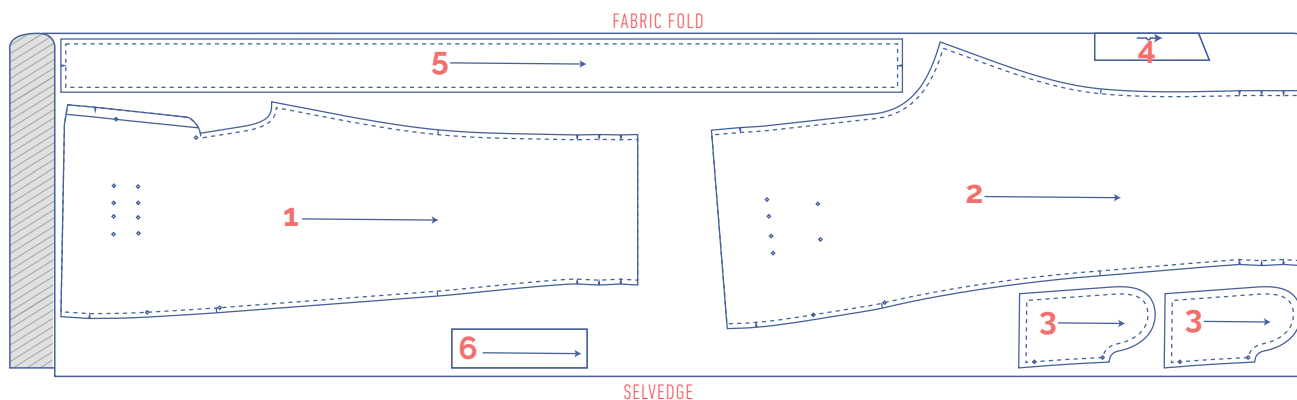




IMPORTANT

You only need pattern pieces 5 and 6 once.

marking pattern pieces

	nick the pattern paper and fabric at the following points
I	single nick
II	double nick
V	V notch

	mark the following points using marking thread.
	centre point
	snap/button

sewing instructions



The method used to finish sewing the garment depends on the fabric used. The pieces are always sewn together with the right sides of the fabric facing together, unless stated otherwise.

F front

B back

RF right front

LF left front


CF centre front

CB centre back

 right side


 wrong side

 iron-on interfacing

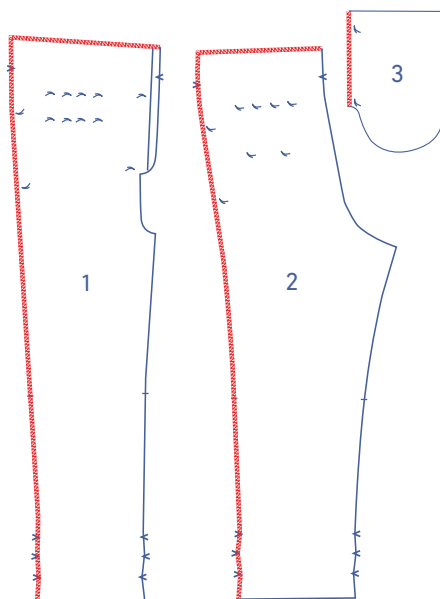


1


Finish the top and the side seam of the front (1) and back (2) and the straight edge of each pocket piece (3) with overlock stitching.

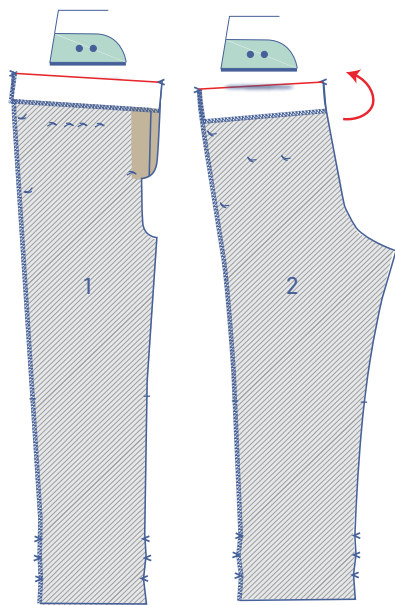


Press the shaped facing of the waist from the V notches at the top of the front and back pieces onto the wrong side to create a fold line. Open back out again.

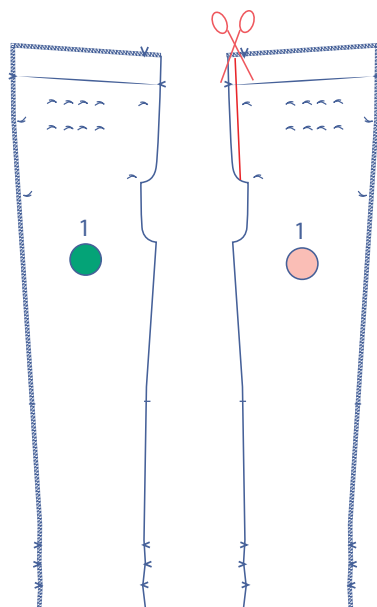


Cut a strip out of the shaped fly on the LF (1) along the indicated line.

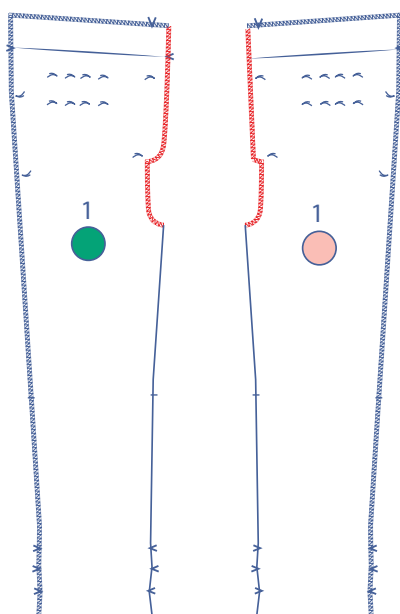


Finish the CF edges with overlock stitching.

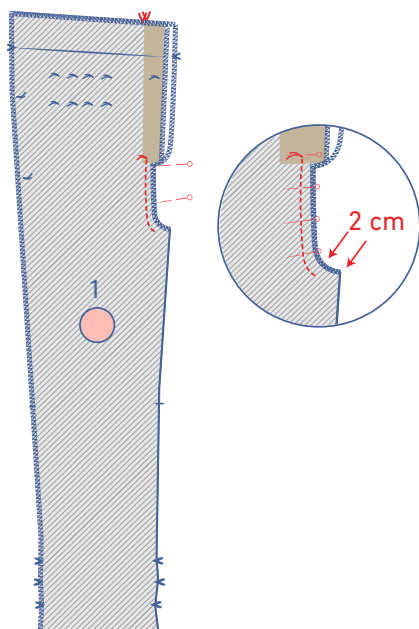


Pin the RF and LF together. Make sure that the V notches on the CF are matching. The shaped fly of the RF should extend slightly past the LF. Sew the lower section of the CF seam as indicated, from the marking thread to around 2 cm from the edge of the inseam.

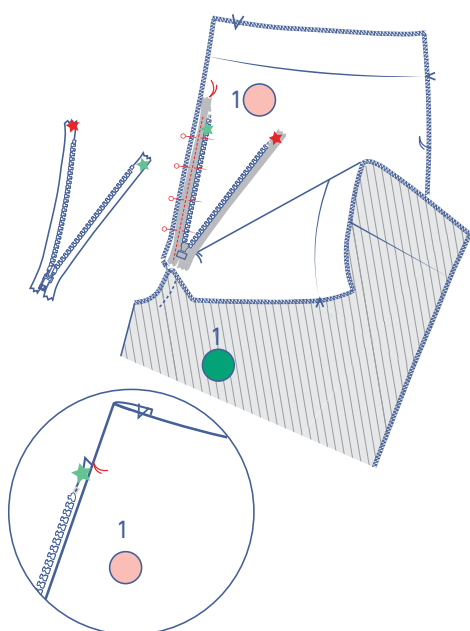


Now insert the zip. First lay the zip with the right side facing up. Open the zip and turn the zip tape over. Now place the side of the zip marked with the green star onto the LF (pink dot). The top end of the zip tape should be level with the marking thread. Pin and sew into place at 1 cm from the CF seam (= the middle of the zip tape) using the zipper presser foot. Next, fold the zip tape back to the left.

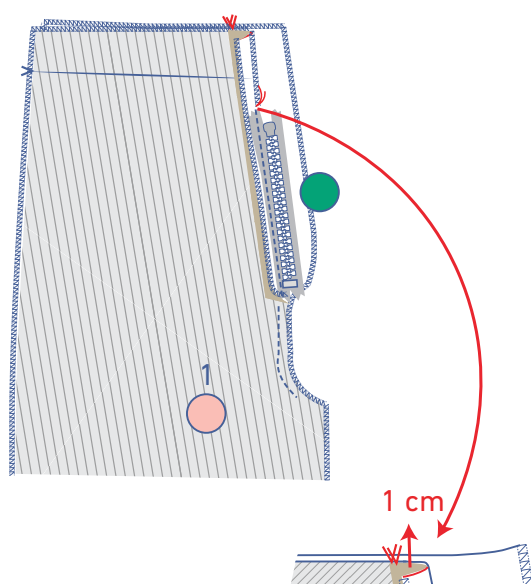

Close the zip and fold both front pieces so the right sides face each other. Ensure the V notches indicating the CF match. Smooth both pieces flat and pin the zip tape (marked with a red star) in place to the shaped RF fly (green dot).

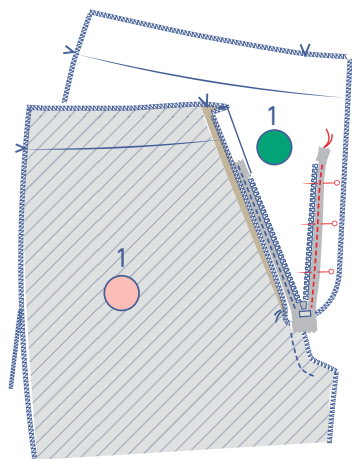


Open the zip and sew the zip tape in place using a zipper presser foot.

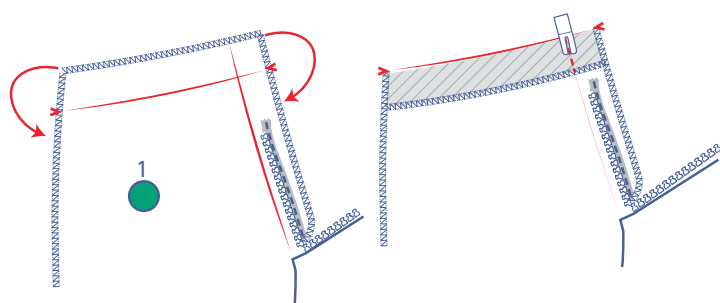


Fold the shaped facing of the waist onto the right side from the fold line at the top of the RF (so the right sides of the fabric are touching).


Sew vertically along the fold line of the shaped fly.




Turn the shaped fly the right way out and pin along the right side. Topstitch the shape of the shaped facing.




Press the LF fly (4) in half at the V notches with the right side of the fabric facing inwards.




Pin and sew the short end at the top.




Turn the right way out and finish the raw edges of the side and bottom together with overlock stitching.

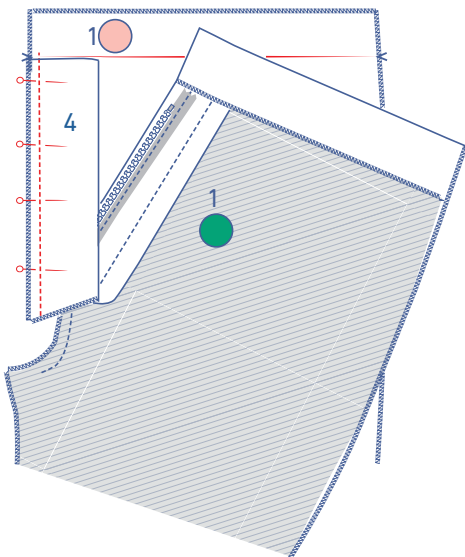


Line up the overlocked raw edges of the fly with the seam allowance of the LF and the zip. The finished top of the fly should be level with the fold line of the waistline's shaped facing. Pin and sew the fly to LF, going through all the layers (fly, zip, and LF).

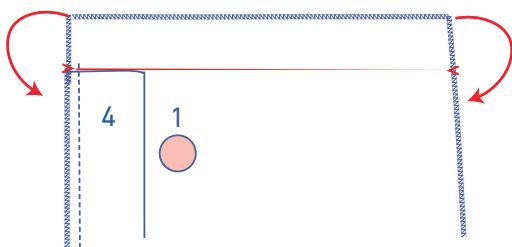


Fold the shaped facing down at the fold line on the top of the LF so that the right sides of the fabric are touching.

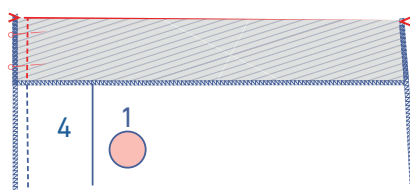

The fly LF should be between the 2 layers of fabric. Pin and sew into place. Turn the right way out.

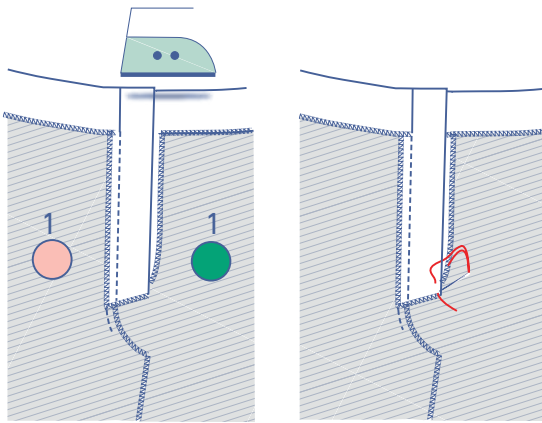


Press the fly to the side and close the zip. Sew the bottom of the shaped RF fly and the LF fly together with just a few stitches.




2


Pin the straight edge of each pocket piece to the side seams of the front and back pieces, matching the marking threads. Sew into place between the marking threads.

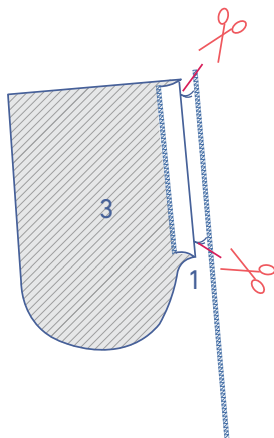


Fold back the seam allowance of the pocket at the front and snip diagonally into the front just up to the marking thread.

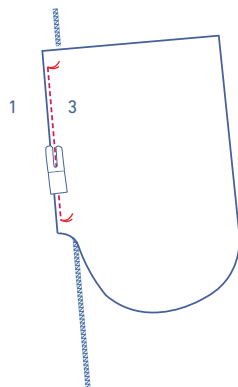


Fold the pocket of the front and the seam allowance over and stitch right next to the seam, sewing through all layers (= the pocket + the underlying seam allowance of the front).

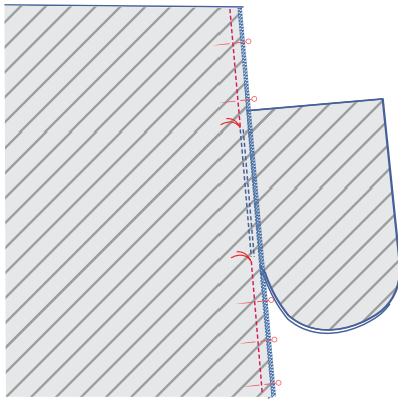


Pin the side seams. Sew from the top down to the marking thread at the top of the pocket opening. Now, sew from the next marking thread at the bottom of the pocket opening down to the hem.

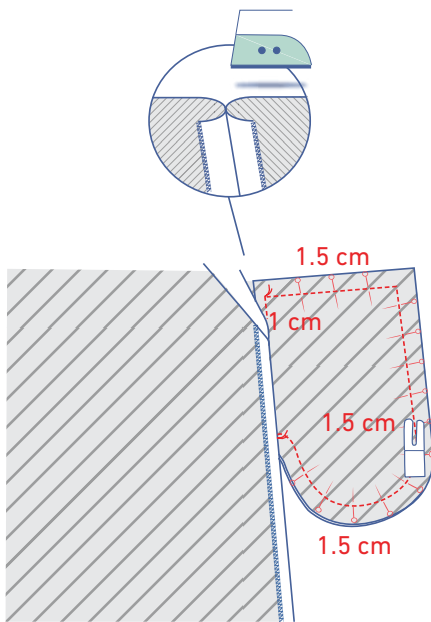

Pin back and front pocket pieces together and sew into place. Move the seam allowance of the side seam of the front and back out of the way, so that you can sew up to the marking threads.

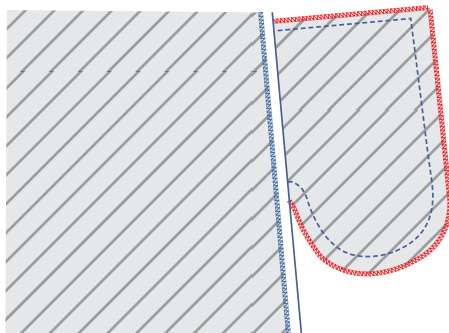


Finish the raw edges together with overlock stitching. Press the seam allowance of the side seams open.

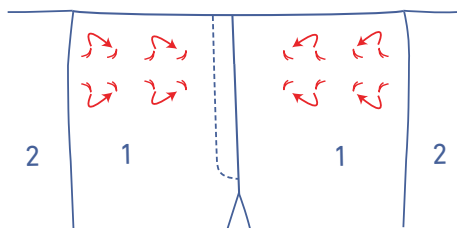


3


To create the pleats on the front, overlap each of the marking threads with the right sides of the fabric facing inwards.




Sew the pleats vertically into place, from marking thread to marking thread.

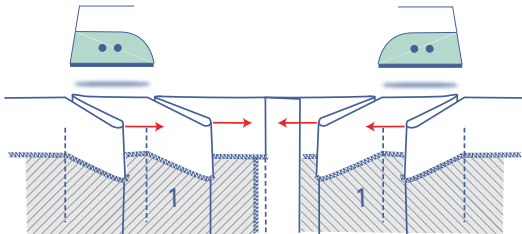

Turn the garment inside out so that the wrong side is facing you. Press the pleats in the direction of the CF.

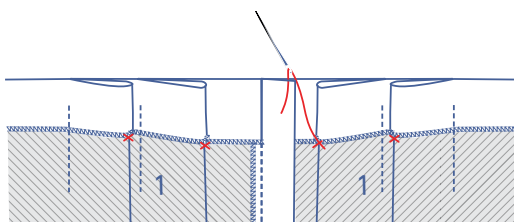


Hand sew the pleat allowance into place on the wrong side with just a few stitches to secure.

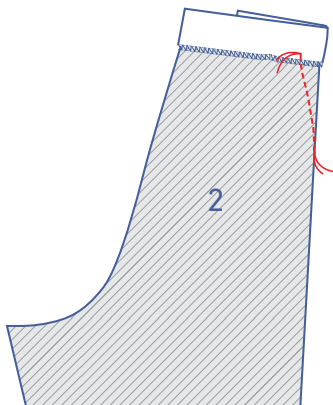


4


To create the pleats on the back, overlap each of the marking threads with the right sides of the fabric facing inwards. Sew down to the bottom marking thread and continue for 1 cm (so you are off the fabric). Snip the thread and make a knot.

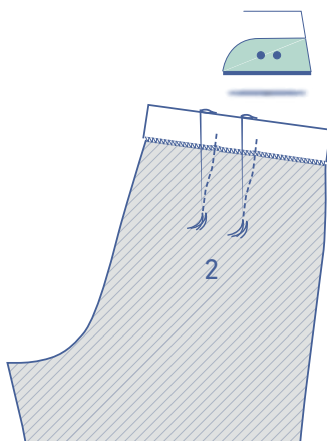


Turn the piece the wrong way out so that the wrong side of the back is facing up. Press the pleat allowance in the direction of the CB.

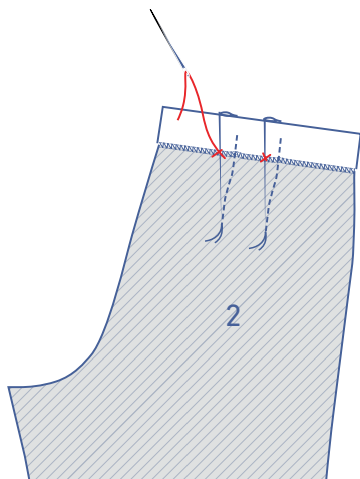


Hand sew the pleat allowance to the wrong side with just a few stitches to secure.

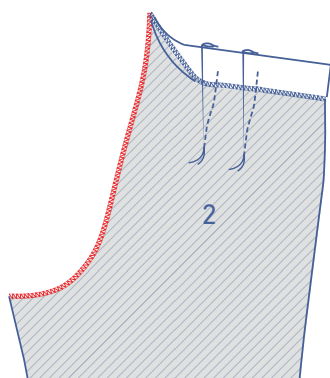

Fold the facing up at the CB and finish the CB seams separately with overlock stitching.

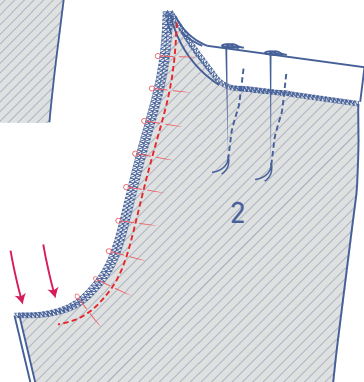


Pin and sew the CB seams until just before the raw edge of the inseam. Fold the shaped facing up.

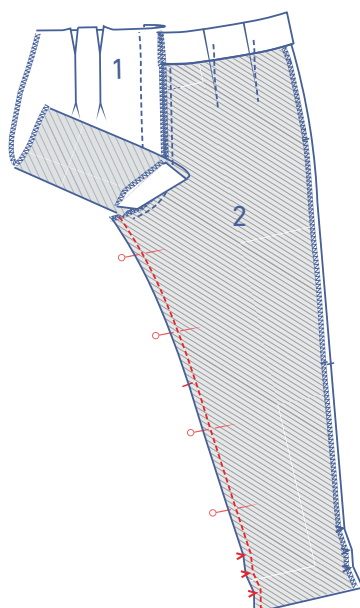


5

Pin and sew the inseams of the front and back pieces of each leg.

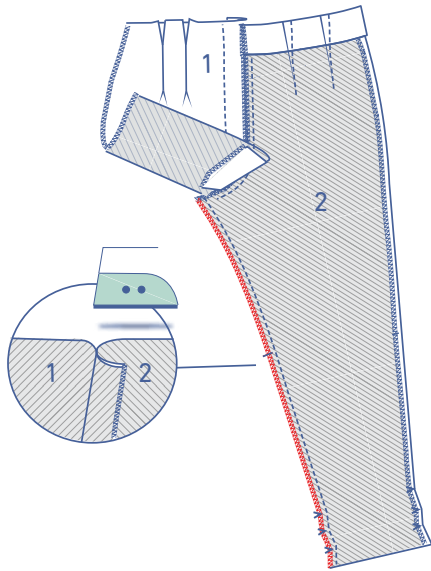


Finish the raw edges together with overlock stitching.
Press the seam allowance towards the back.

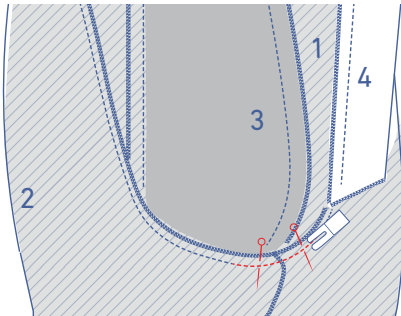

6

Slide one trouser leg into the other with the right sides of the fabric facing each other. Pin and sew the remaining piece of the crotch seam.

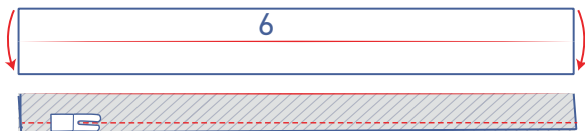


7


Press the belt loops (6) in half lengthwise with the right sides touchings. Sew the long end together.




Turn the right way out and topstitch right next to the edge on both sides.





Cut the strip for the belt loops into 4 equal parts.



Fold over the unfinished ends of each belt loop by 1 cm and press.

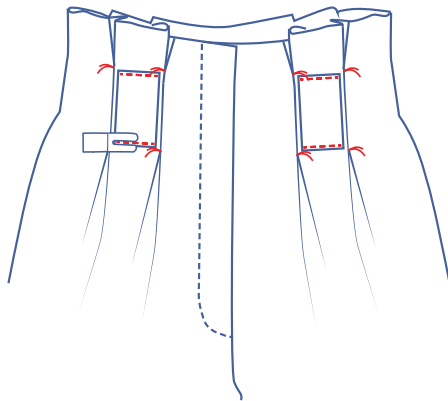


Pin the 4 belt loops to the trousers, with each belt loop right between the pleats. Sew into place right next to the edge.

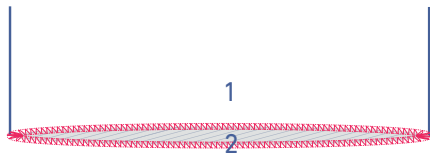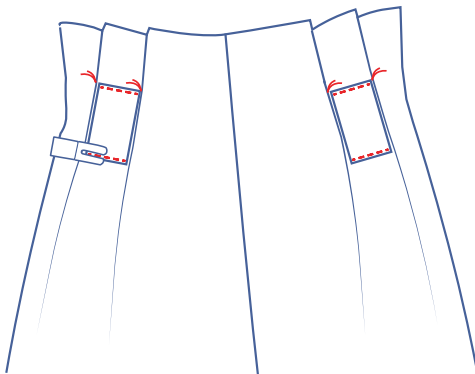


8

Finish the hem with overlock stitching.

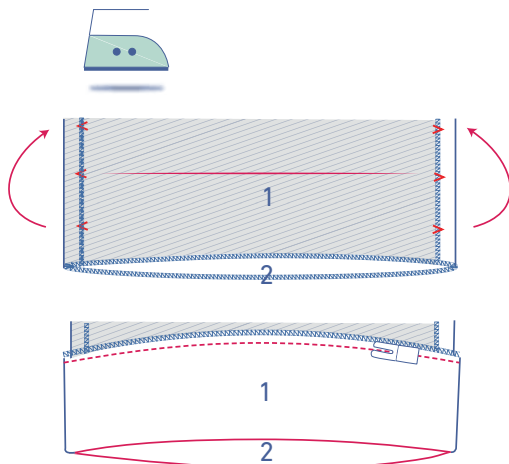


Fold over the hem to the centre-most V notches and sew into place right next to the overlocked edge.

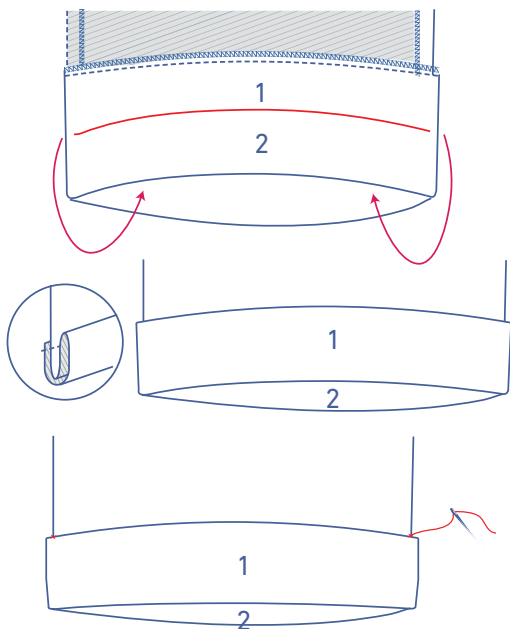


Fold the hem (= rolled trouser cuff) from the other set of V notches onto the right side of the trousers.

Sew into place at the side seams.

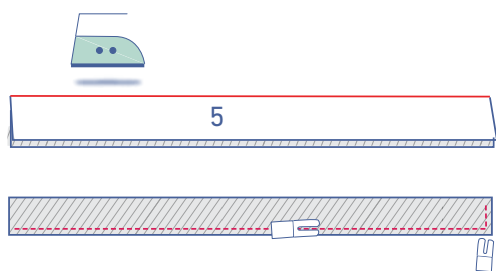


9

Fold the belt (5) in half lengthwise with the right sides together. Sew together where indicated.



Turn the belt right side out. Pull the unfinished short end through both D-rings. Press the raw edge over and sew the edge neatly closed.

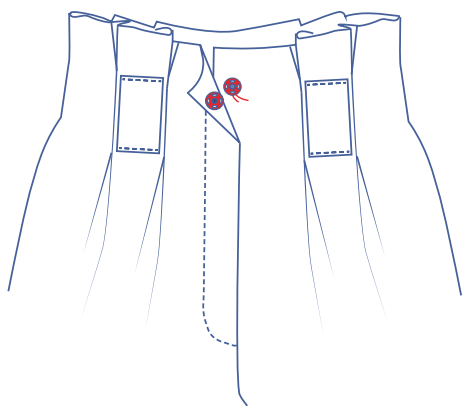

Sew the snap on.