

# Jo by Fibre ood





# Jo by Fibre ⚡ood



**XS - XXXL**


Marie Kondo's rule of thumb is that simplicity is beauty. This short jumper with three-quarter-length balloon sleeves is sure to become one of your favourite wardrobe basics. Trim fabric is used for the neck binding, wrist trim, and hem band. Jo can be vogue or sporty with trousers or chic with a skirt. This sewing project is definitely beginner friendly. Jo's catchphrase is 'less is more'.

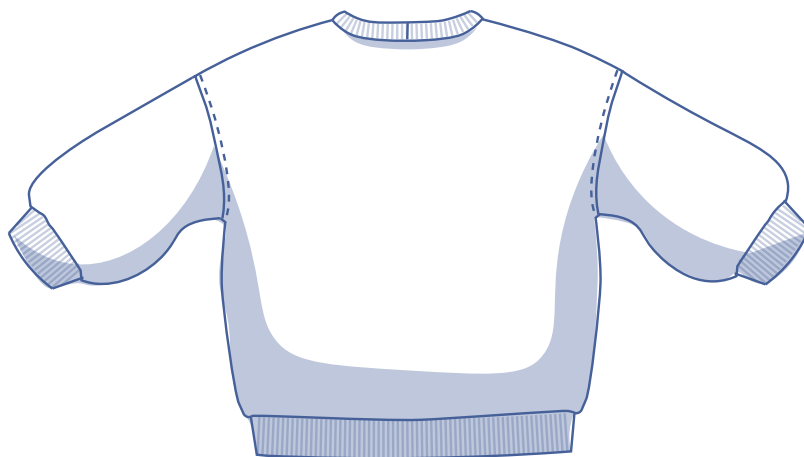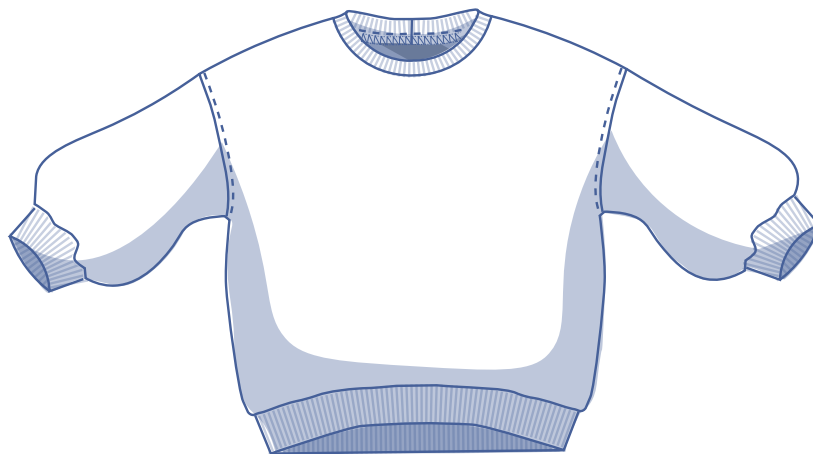


## size chart (in cm)

size	XS		S		M		L		XL		XXL		XXXL		
	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
body height	160	164	166	167	168	169	170	171	172	172	172	172	172	172	172
B (bust)	76	80	84	88	92	96	100	104	110	116	122	128	134	140	146

Choose your size based on your **bust measurement**. Pick the size that is the best match for your bust.

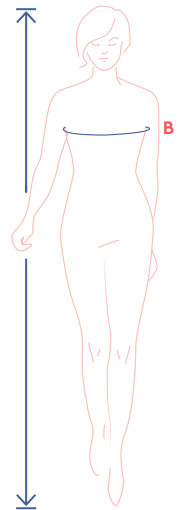

## pattern measurements (in cm)

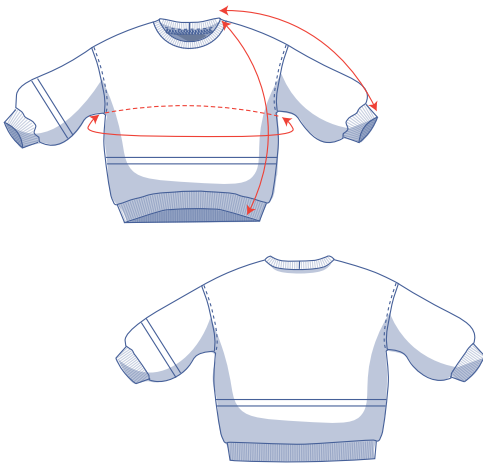

This chart's measurements are the pattern measurements based on the fabric type and serve as a reference. Ease has been added to the width measurements (in addition to the exact body measurements) for a more comfortable fit. Jo is designed to have an **oversized cut**.

Not terribly keen on oversized items? Just go a size smaller.

== shorten or lengthen the pattern here

size	XS	S	M	L	XL	XXL	XXXL
length*	58	59.75	61.75	63.5	66.75	71	75.25
sleeve length**	52.25	54.5	56.5	58.75	60.75	62.75	65
bust	101.5	109.5	117.5	125.5	135.5	147.5	159.5

\* Including hem band.

\*\* Including shoulder length, neck and wrist trim.

Compare the stated lengths to the measured or desired lengths. **Lengthen** or **shorten** the jumper and/or the sleeves by cutting the pattern pieces at the indicated double lines. Then either increase the distance between the cut pieces by the desired amount (to lengthen) or overlap the pieces (to shorten). Make sure that the CF and CB lines and the side seams are always straight.



### IMPORTANT

Adjust the amount of fabric to be used based on these alterations.

## notions



- Thread
- Trim fabric (width 35 cm): max. 60 cm
- Fabric: see table

fabric		XS	S	M	L	XL	XXL	XXXL
fabric width 110 cm	cm	140	145	150	155	165	170	175
fabric width 140 cm	cm	95	95	95	100	160	165	175


The corresponding fabric layout can be found on page 6 of these sewing instructions.

## fabric advice



Knitted fabrics and Jo are a match made in heaven, e.g. French Terry, sweatshirt fabric, (rib) knit, knit jacquard, etc. Make the neck binding, wrist trim, and hem band in (rib) trim fabric. Feeling adventurous? Try a woven fabric. In which case, be sure to use rib fabric for the trim.

# Proud to be #Sewista



## pattern pieces & seam allowances (in cm)

To sew the garment as described in the instructions, draw the illustrated seam allowances around the paper pattern pieces before cutting them out. If you are using a PDF pattern, the pattern can be printed with or without seam allowance.

To find out more, watch the [video](#).

1. front: 1x on fabric fold

2. back: 1x on fabric fold







3. sleeve: 2x

4. wrist trim: 2x

5. neck band: 1x on fabric fold




6. hem band front: 1x on fabric fold

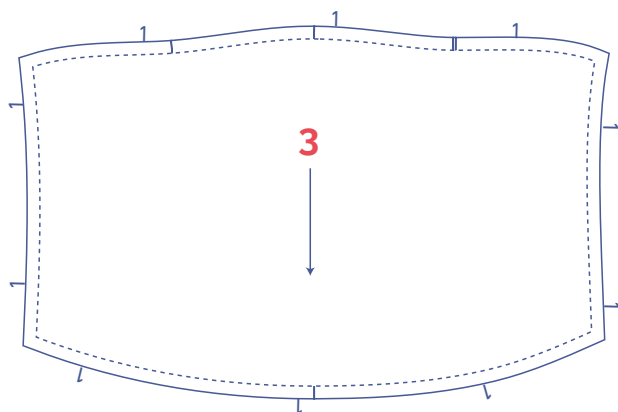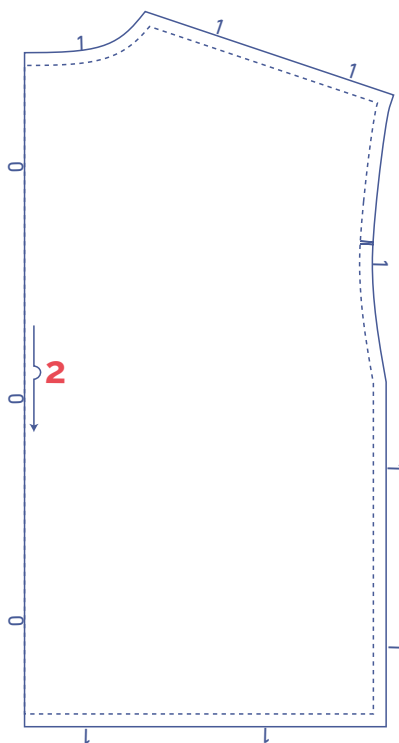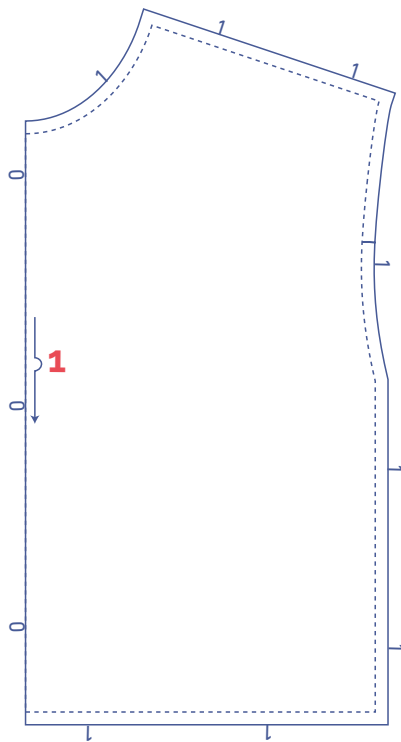7. hem band back: 1x on fabric fold




### IMPORTANT

Pattern pieces 6 and 7 are the same.

 material type	
 fabric	
 trim fabric	


**fabric layout – solid fabrics**  
**fabric width 110 cm**

XS - XXXL

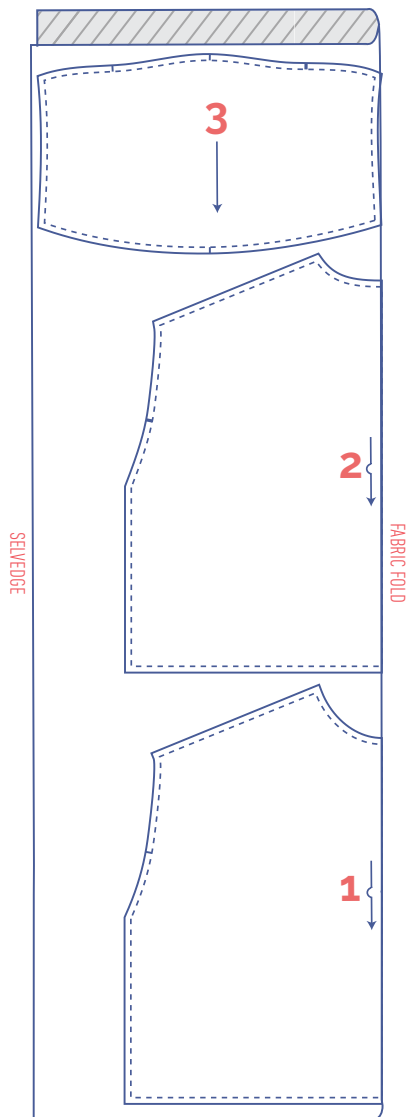

**trim fabric for XS - XXXL**


XS - XXXL

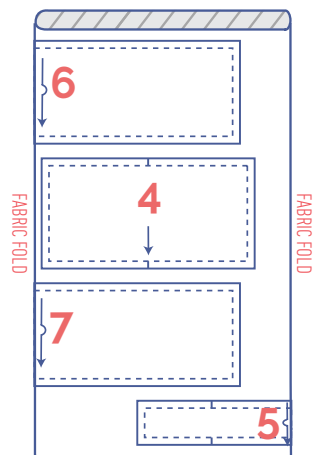


## fabric layout – solid fabrics

### fabric width 140 cm

XS - L

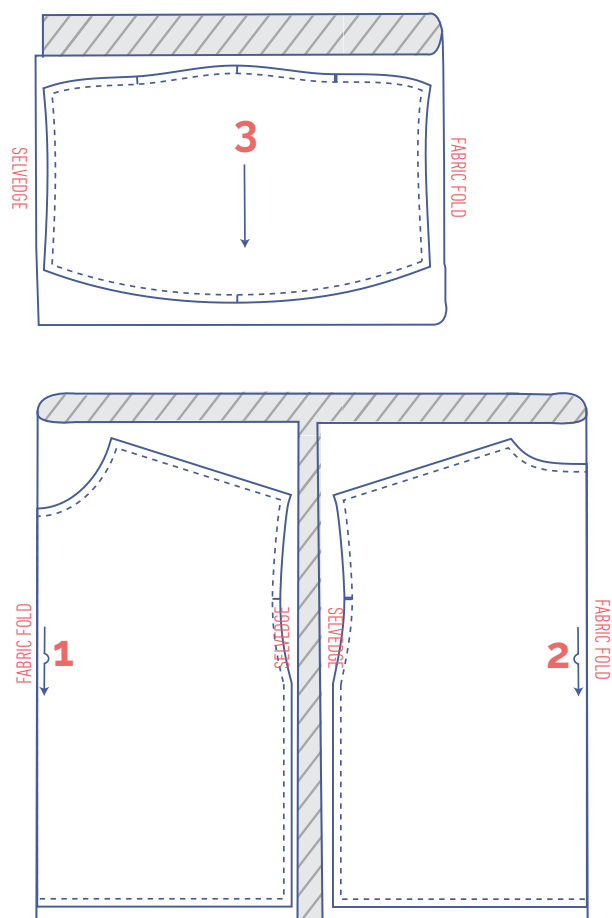


XL - XXXL

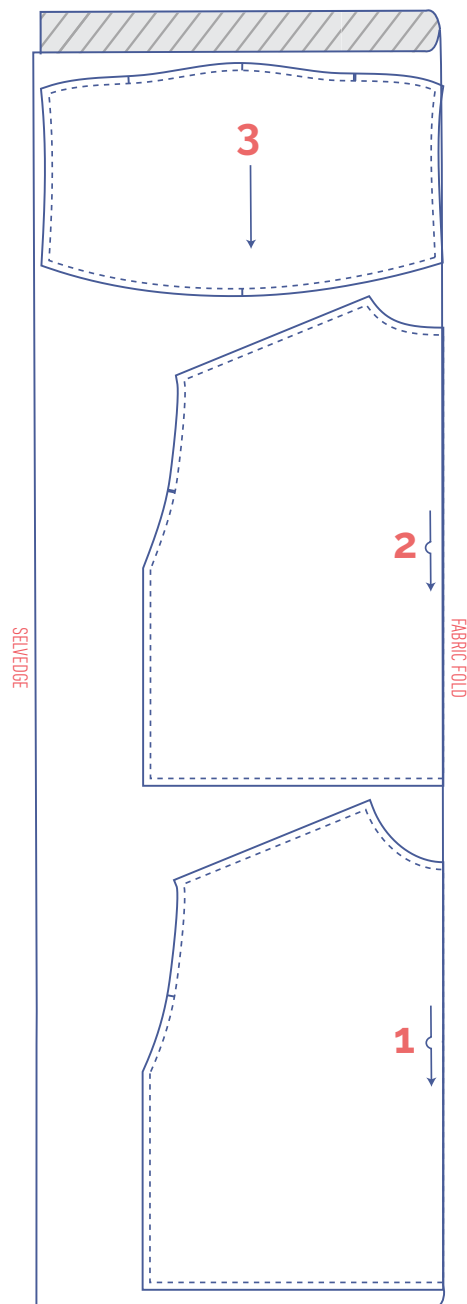

## trim fabric for XS - XXXL

XS - XXXL

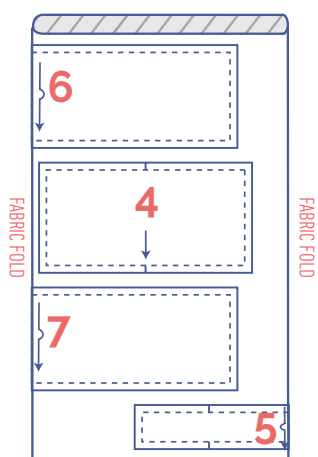

## marking pattern pieces



Notch the pattern paper and fabric at the following points:



single notch



double notch



V notch

# sewing instructions



The sewing instructions explain how to make the jumper if you don't have an overlocker. Select a stretch stitch setting on your sewing machine to sew the seams and an overlock stitch to finish the raw edges. The jumper can also be made using just a 4-thread overlocker, i.e. 2 upper looper threads and 2 lower looper threads. This finishes the raw edges and sew the seams together at the same time. The seams will stay stretchy.



F front

B back


CF centre front

CB centre back

 right side

 wrong side


 trim fabric

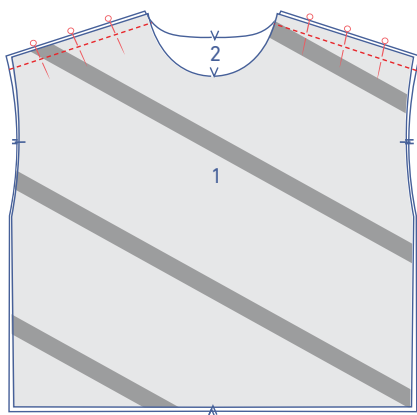


**1**

Pin and sew the shoulder seams of the front (1) and back (2) together.




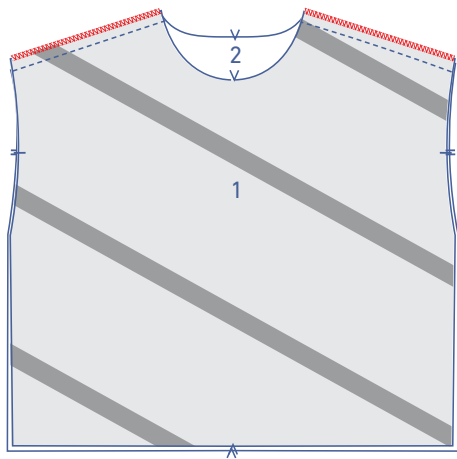

Finish the raw edges with overlock stitching.

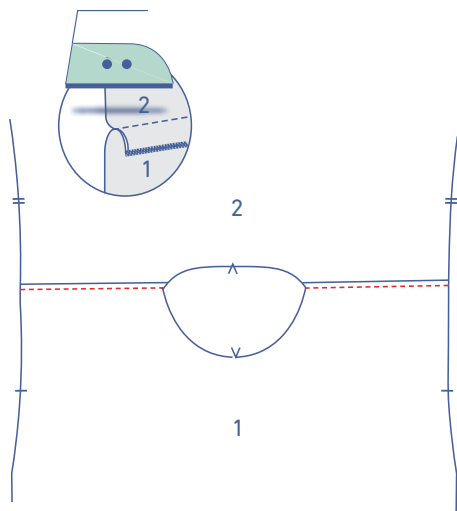


Press the seam allowance towards the front. Topstitch the front at presser foot width from the seam.

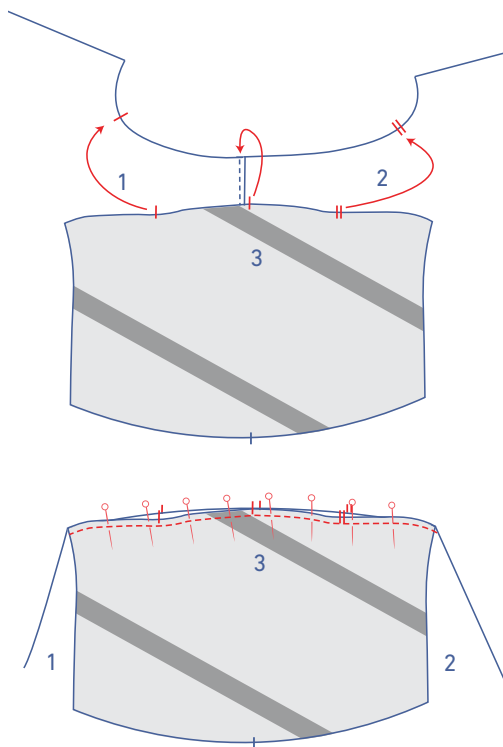


## 2


Pin and sew the top of the sleeve (3) (= the sleeve cap) to the armhole, matching the notches. The single notch marks the front, while the double notch marks the back. The single notch at the top aligns with the shoulder seam. Distribute the 'excess' fabric evenly between the other single notches.

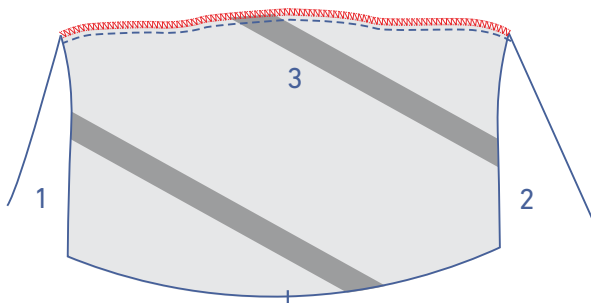

Finish the raw edges with overlock stitching.

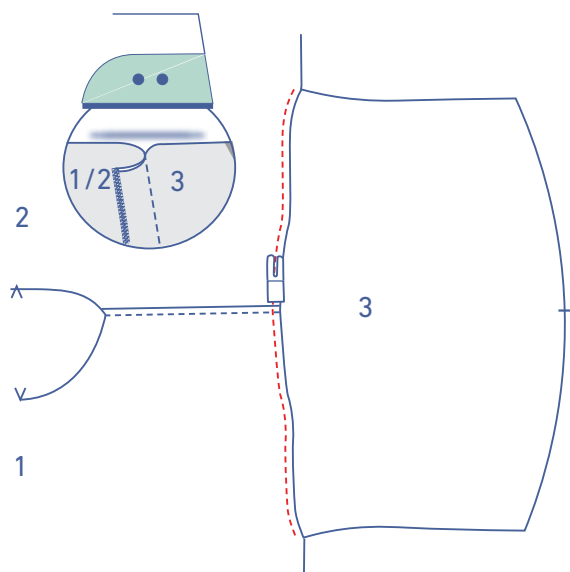


Press the seam allowance towards the body (1+2).  
Topstitch the body at presser foot width from the seam.

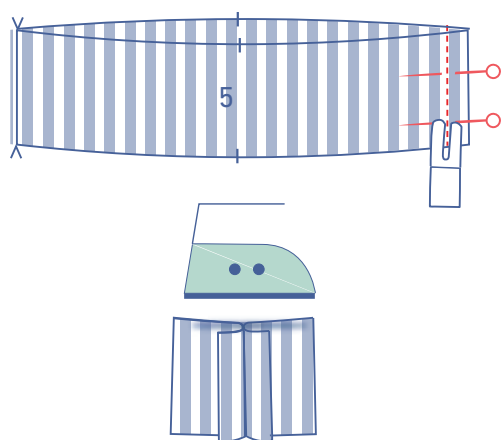


**3**


Fold the neck band (5) in half with the short ends together and the right sides of the fabric facing. Pin and sew the CB seam together. Press the seam allowance open.

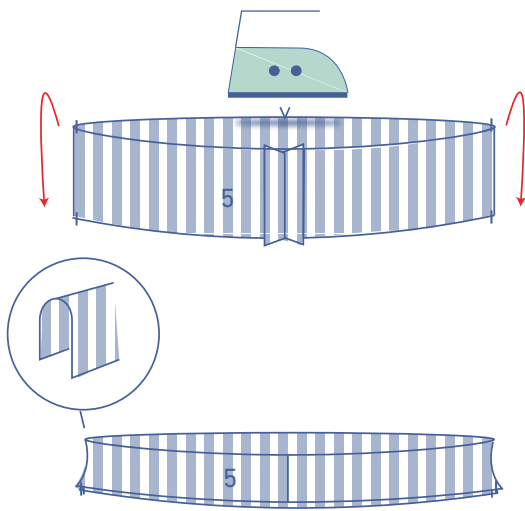


Fold the neck band in half with the long ends together and the wrong sides of the fabric facing.

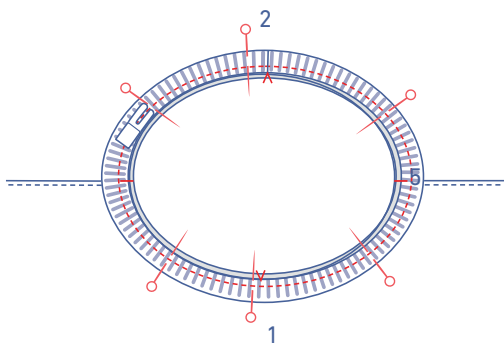

Pin and sew the raw edges of the neck band to the neckline. The CB seam of the neck binding aligns with the V notch in the back, the notches in the neck band match those in the shoulder seams, and the V notches in the CF of the neck band match those on the CF on the front. The circumference of the neck binding is smaller than the neckline, so make sure to pin at all the notch points and stretch out the binding as you sew.

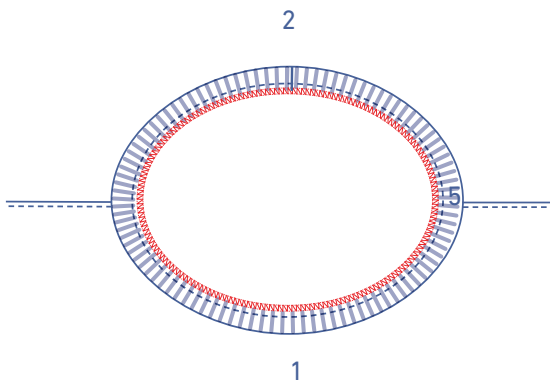


Finish the raw edges with overlock stitching.

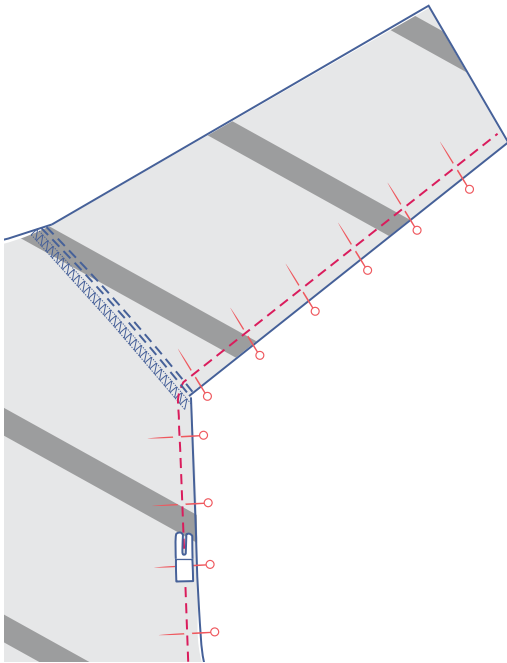


## 4

Pin and sew the side and underarm seams.

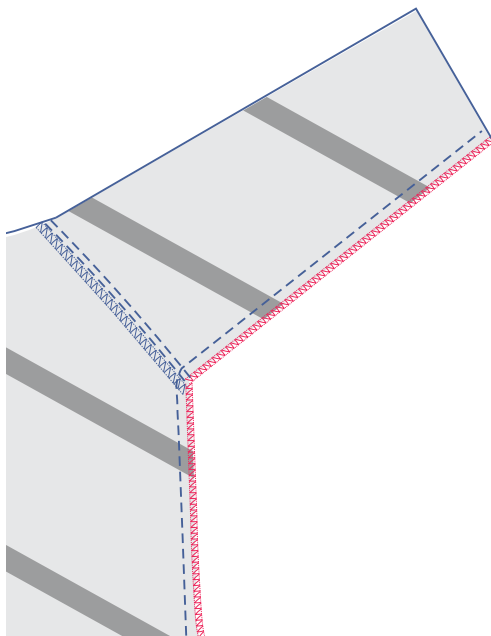


Finish the raw edges with overlock stitching.

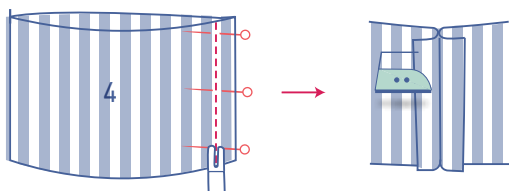


## 5


Fold the wrist trim (4) in half with the short ends together and the right sides of the fabric facing. Sew the seam and press the seam allowance open.

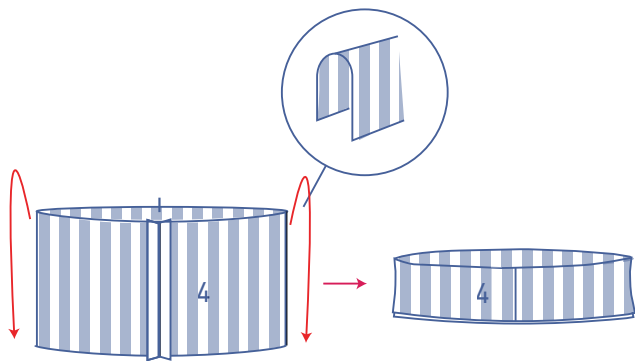


Fold the wrist trim in half with the long ends together and the wrong sides of the fabric facing.

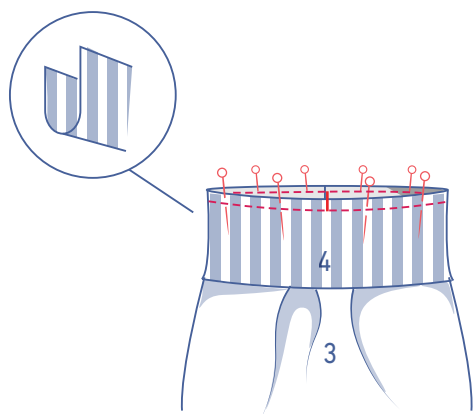

Slide the wrist trim over the bottom of the sleeve so that the raw edge of the wrist trim is aligned with the raw edge of the sleeve. Pin and sew, making sure the seams and markings match. The circumference of the wrist trim is smaller than the circumference of the sleeve so stretch out the wrist trim as you sew.




Finish the raw edges with overlock stitching.

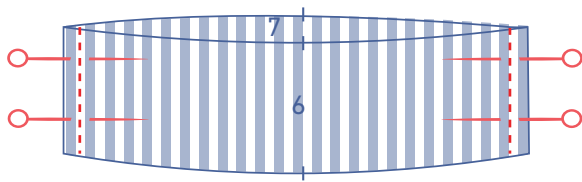


**6**


Pin and stitch the side seams of the hem band front (6) and hem band back (7) together and press the seam allowance open.

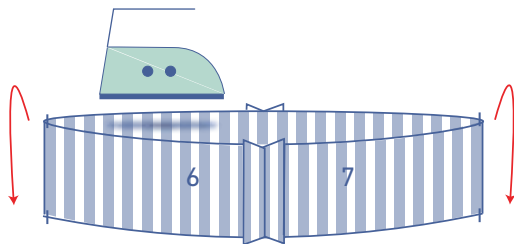

Fold the hem band in half with the long ends together and the wrong sides of the fabric facing.

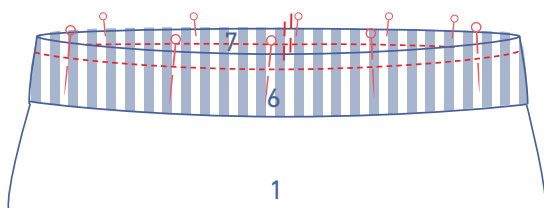

Slide the hem band over the bottom of the jumper so the raw edge of the hem band is aligned with the raw edge of the body. Pin and sew, making sure the side seams and notches match. The circumference of the hem band is smaller than the circumference of the top so stretch out the hem band as you sew.

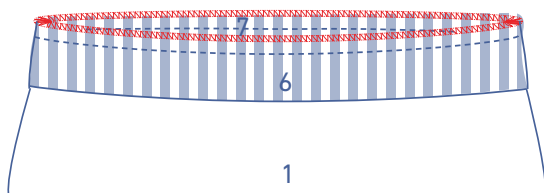

Finish the raw edges with overlock stitching.